

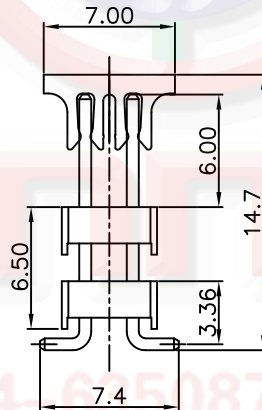
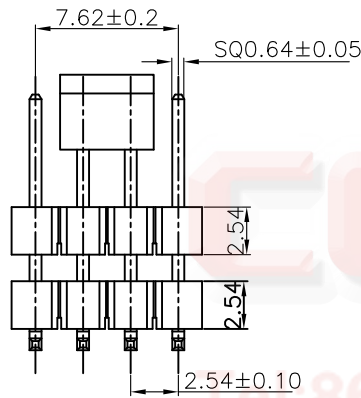


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/07/15'		



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

NOTES:

- MATERIAL
  - INSULATOR:THERMOPLASTIC(UL94 V-0).
  - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
  - CURRENT RATING:3 Amp.
  - INSULATION RESISTANCE:1000MΩ Min.
  - DIELECTRIC WITHSTANDING:600VAC.
  - CONTACT RESISTANCE:50mΩ Max.
  - OPERATING TEMPERATURE:-40°C TO+105°C.

- PART NUMBER: DS1029-06
- PRODUCT NUMBER CODE:

DS1029-06 - X X X X X - ELTECH - 026

- MOUNTING TYPE  
S: SMT TYPE
- HOUSING COLOR  
B:BLACK
- CONNECTOR PLATING  
8: FULL GOLD FLASH
- CONECT TYPE  
P:PLUG
- No.OF CONTACTS  
2\*4

Tel:86-574-63508787  
Fax:86-574-63510817  
E-mail:sale@connfly.com  
http://www.connfly.com  
Add:East Industry Zone KuangYan  
Town Cixi Ningbo China  
P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

PROJECTION	TITLE
UNITS	2.54mm PITCH PIN HEADER DUAL ROW S.M.T
SHEET SIZE	SERIES DS1029-06 SERIES

**FOR ELTECH ONLY**

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1029-06-XXXXX-ELTECH-026		

**晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**