

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'	~	

NOTES:

1. MATERIAL

- 1.1 INSULATOR:THERMOPLASTIC(UL 94V-0).
- 1.2 CONTACT MATERIAL:COPPER ALLOY.

2. SPECIFICATION

- 2.1 CURRENT RATING:1.0 Amp.
- 2.2 INSULATION RESISTANCE:1000MΩ Min.
- 2.3 DIELECTRIC WITHSTANDING:300VAC.
- 2.4 CONTACT RESISTANCE:20mΩ Max.
- 2.5 OPERATING TEMPERATURE:-40°C TO+105°C.

3. PART NUMBER: DS1031-16

4. PRODUCT NUMBER CODE:





DS1031-16 - X X X X

HOUSING COLOR
B:BLACK

CONTACT PLATING
8: FULL GOLD FLASH
6: FULL TIN

MOUNTING TYPE
V: STRAIGHT TYPE

No.OF CONTACTS
06 ~ 40

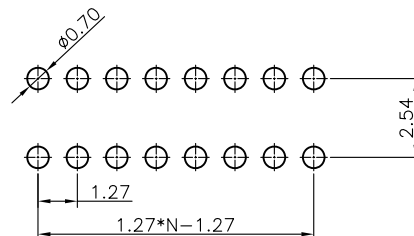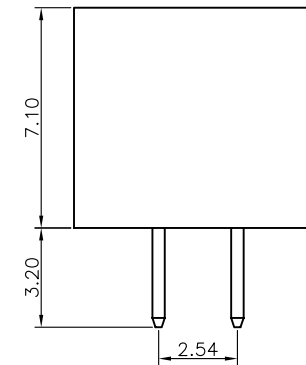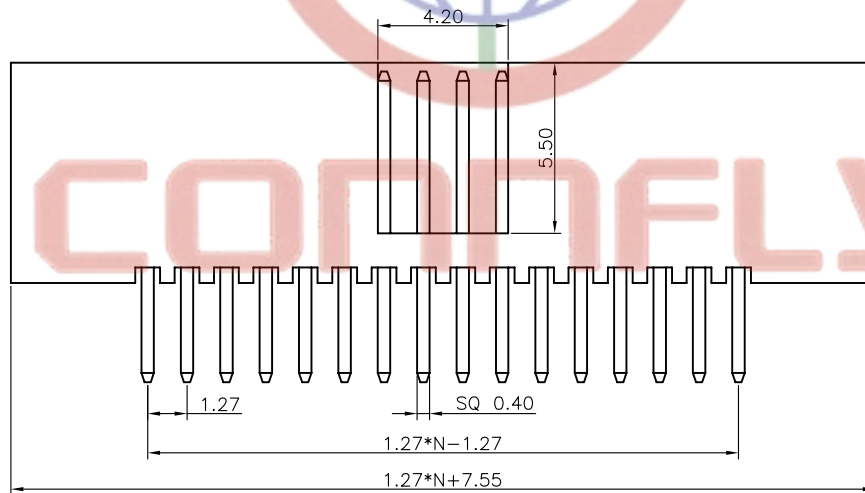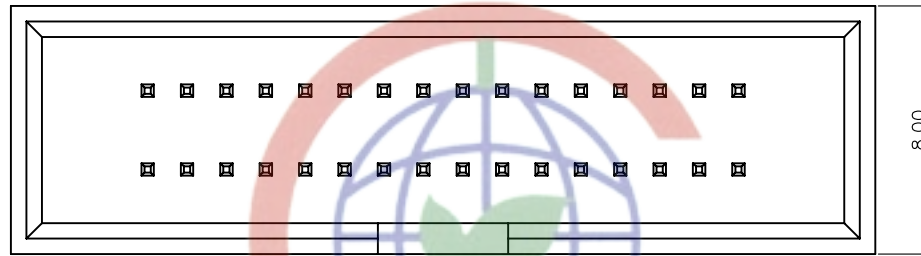

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	UNIT	TITLE
X.	±0.60	X.	±5°	mm	mm	1.27*2.54mm BOX HEADER PITCH
.X	±0.38	.X	±3°			
.XX	±0.25	.XX	±2°			
DRAWING TYPE		CUSTOMER		SHEET SIZE		
SCALE		1:1		A4		
DRAWING NO.		C-DS1031-16-XXXX		SERIES		
				DS1031-16 SERIES		



晨翔电子有限公司
CONNPLY CONNPLY ELECTRONIC CO. LTD

Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@zhenqin.com.cn

Http://www.connfly.com

Add:East Industry Zone, Kiang Yan

Towin Sixiangbo China

P.C:315333