


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/24/09	~	

3D MODEL(SCLAE 1:2)

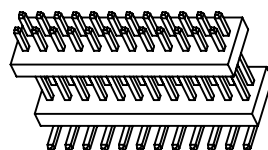

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.0 Amp.
 - INSULATION RESISTANCE:500MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.

3. PART NUMBER: DS1031-28

4. PRODUCT NUMBER CODE:

DS1031-28 - X X X X X X X X X

POST SUPPORT
S:W/ POST
X:W/O POST

PACKING TYPE
T:TRAY
R:TAPE ON REEL
B:TUBE

PICK UP SUPPORT
S:W/ PICK UP
X:W/O PICK UP

DIM.A B TYPE
1: TYPE 1
2: TYPE 2
3: TYPE 3


MOUNTING TYPE
S: SMT TYPE

HOUSING COLOR
B:BLACK

CONTACT PLATING
8: FULL GOLD FLASH

CONNECTOR TYPE
P:PLUG

No.OF CONTACTS
2*2-2*40

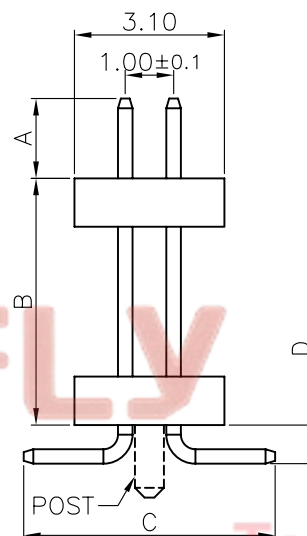




TYPE	DIM A	DIM B	DIM C	DIM D
1	1.65	5.10	5.20	0.80
2	1.65	6.73	5.20	0.80
3	1.65	9.00	5.20	0.80
4				
5				
6				

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1031-28-XXXXXXX		

PROJECTION	TITLE	DUAL ROW PIN HEADER	
UNITS	mm	PITCH	1.00mm
SHEET SIZE	A4	STACK	SMT TYPE
SERIES	DS1031-28	SERIES	DS1031-28



晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

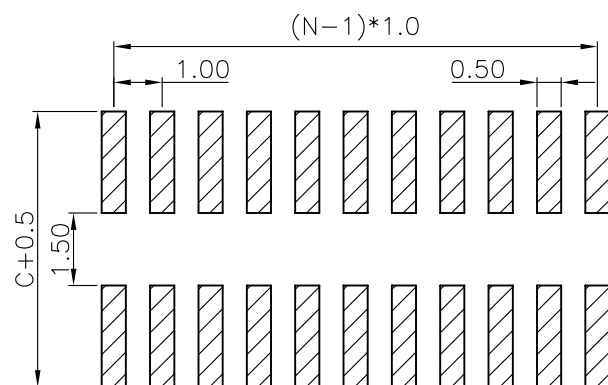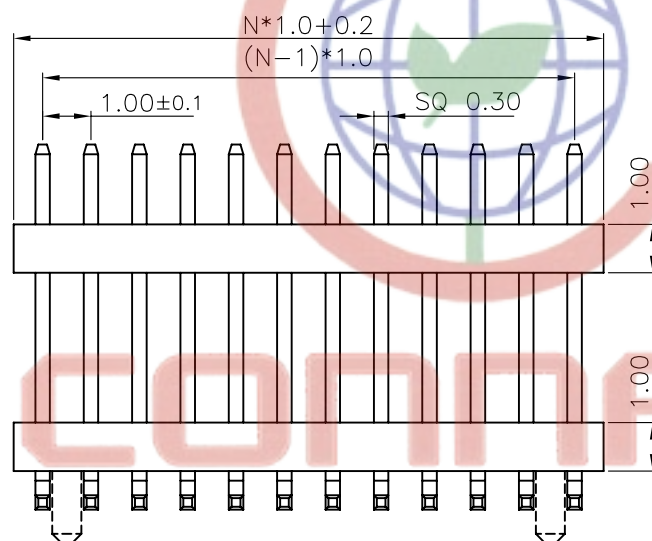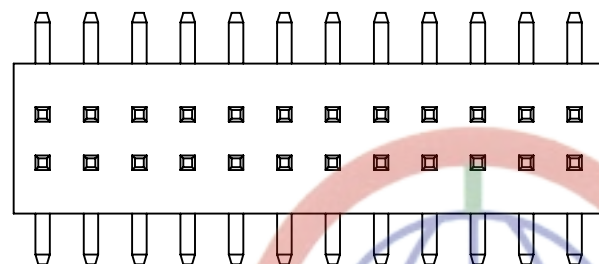

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)