


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 11/02/15'	~	

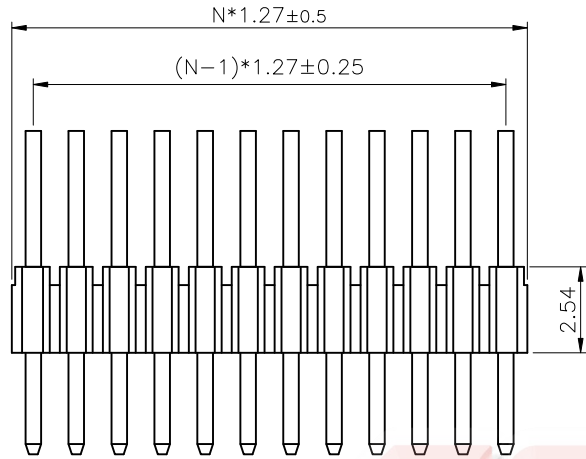

N=No.OF CONTACTS/2



TYPE	DIM A	DIM B	DIM C
1	3.20	3.65	1.25
2			
3			
4			
5			
6			
7			

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.0 Amp.
 - INSULATION RESISTANCE:500MΩ Min.
 - DIELECTRIC WITHSTANDING:300VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.
- PRODUCT NUMBER CODE:

DS1031-42 - X X X X X X - X

- PLATING LEVEL
3A: 3A LEVEL
- DIM.A B TYPE
1: TYPE 1
- MOUNTING TYPE
R: R/A TYPE
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
- CONNECTOR TYPE
P:PLUG
- No.OF CONTACTS
2*2-2*40

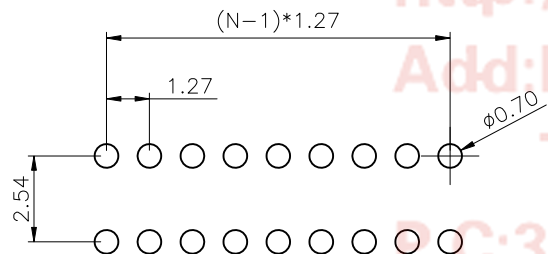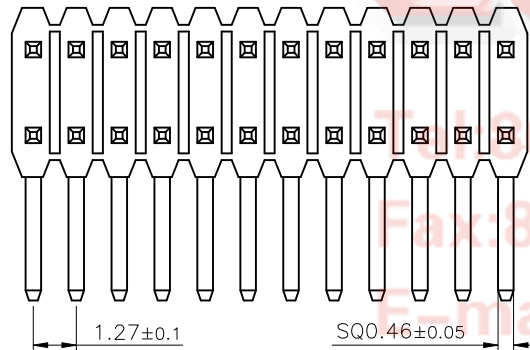

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1031-42-XXXXXX-X-A		

PROJECTION	TITLE	1.27*2.54mm PITCH PIN HEADER R/A TYPE	
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1031-42 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

CONNFLY
Tel: 86-574-89508787
Fax: 86-574-83510817
E-mail: sale@connfly.com
http://www.connfly.com
Add: East Industry Zone KuangYan
Town Cixi Ningbo China
P.C: 315333