






REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/27/05'		
B	增加螺丝类型 D	L L 06/06/06'		

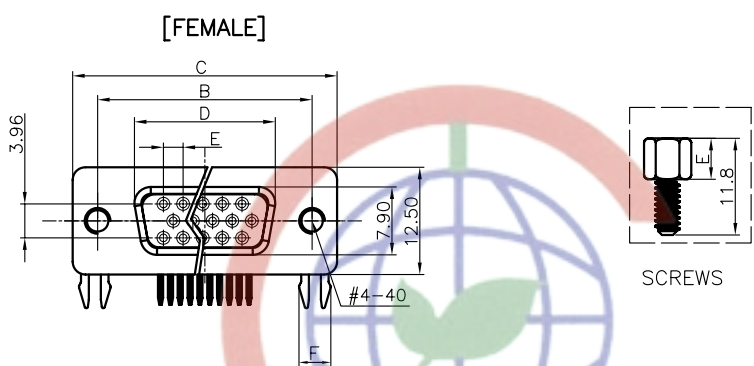



SCREWS





WITH SCREW TYPE

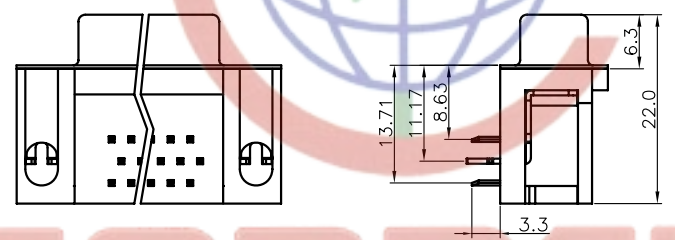

WITH RIVET TYPE

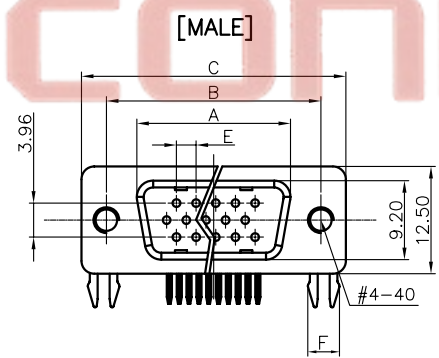

RIVET TYPE WITH FIXED SCREWS

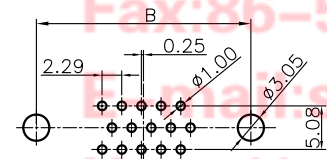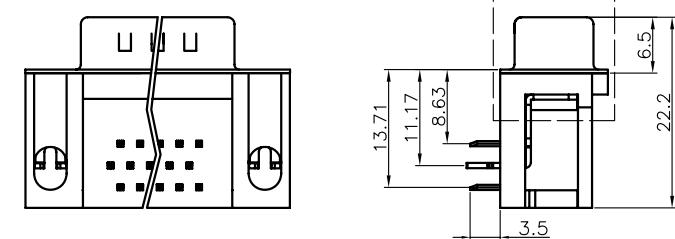

RECOMMEND PCB LAYOUT (TOLERANCE ±0.05)
(VIEW FROM TOP SIDE)

NOTES:

- PRODUCTS PERFORMANCE:
 - VOLTAGE RATING: 250V AC.
 - CONTACT CURRENT RATING: 1.5A MAX. PER PIN.
 - CONTACT RESISTANCE: 20mΩ MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ MIN.
 - TEMPERATURE RANGE: -45°C~+105°C.
- PRODUCT NUMBER CODE:

DS1038 - X X X X X X X X

- SCREW DIM. E
 - 4: 4.80mm
 - 5: 5.80mm
- BOARD LOCK DIM. F
 - 4: 4.00mm
 - 7: 3.70mm
- SCREW TYPE
 - A: WITH SCREW TYPE
 - B: WITH RIVET TYPE
 - C: RIVET TYPE WITH FIXED SCREWS
 - D: RIVET TYPE WITH SCREWS IN BULK PACKAGE
- CONTACT PLATING
 - Si: SELECTIVE GOLD FLASH
 - 8: FULL GOLD FLASH
 - 6: FULL TIN
- SHELL PLATING
 - N: Nickel
 - T: Tin
- COLOR OF HOUSING
 - Y: Yellow
 - B: BLACK
 - U: BLUE
 - C: BLUE(PC99)
- CONNECTOR TYPE
 - M: MALE
 - F: FEMALE

- No. OF CONTACTS
 - 15: 15pos.
 - 44: 44pos.
 - 26: 26pos.
 - 62: 62pos.


Dimension

Position	A±0.2	B±0.2	C±0.3	D	E
15	17.90	24.99	30.84	16.33	2.29
26	26.50	33.32	39.14	24.66	2.29
44	40.00	47.04	53.04	38.38	2.29
62	56.50	63.50	69.32	54.84	2.41

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION	TITLE
UNITS mm	D-SUB H.D RIGHT ANGLE TYPE
SHEET SIZE A4	SERIES DS1038 SERIES

DRAWING TYPE	CUSTOMER
SCALE 1:1	SHEET 1 OF 1
DRAWING NO. C-DS1038-XXXXXXX	


晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

Tel: 86-574-635087
 Fax: 86-574-635108
 Email: sale@zhengxin.com.cn
 Http://www.connfly.com