
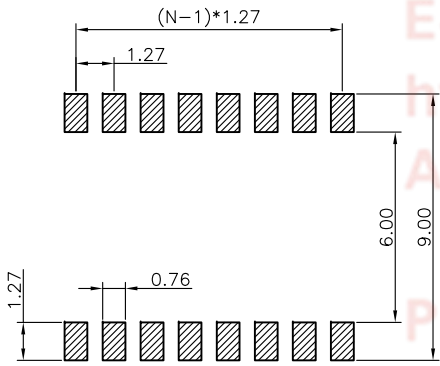




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 07/31/17'	~	

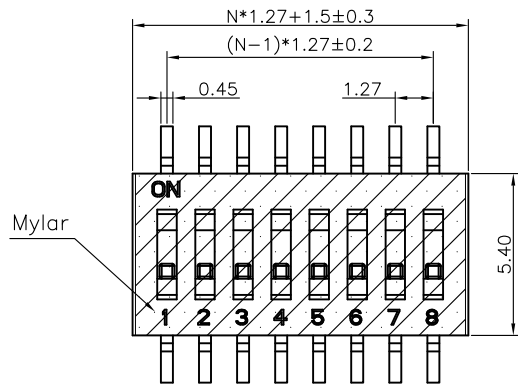

Specification:

- Contact resistance: 100mΩ max.
- Dielectric withstanding voltage: 250 VAC 1minute.
- Insulation resistance: 1000 MΩ min.
- Temperature range: -40°C ~ +105°C.
- Operating Life: 2000 cycle min.

Material:

- Insulator: high temperature 260°C,UL 94V-0.
- Contact: copper alloy.

Product number code:

DS1040-03 - X X X X

- Packing type
- B: tube
- T: tray
- R: tape & reel
- Actuator color
- W: White
- Housing color
- B: Black
- Mounting type
- S: SMT type
- No. of contacts
- 2 3 4 5 6 7
- 8 9 10 11 12



Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	SWITCH PITCH 1.27mm SMT WITH MYLAR TYPE	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1040-03	
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.		C-DS1040-03-XXXXX-A						