

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/08/18'		

NOTES:

1. SPECIFICATIONS



- . Contact Rating: 100mA at 30Vdc
- . Insulation Resistance:100MΩ min.
- . Contact Resistance:100mΩ max.
- . Dielectric Withstanding Voltage: 250V AC(rms) for 1 minute.
- . Operating Life:10,000 cycles
- . Travel:1.5±0.3mm
- . Operation Temperature Range: -25°C to +70°C

- . Wave Soldering: Recommended Solder Temperature At 500°f(260°C)max. 5 Seconds
- . Hand Soldering: Use Soldering Iron Of 30 Watts,Controlled At 608°f(320°C)Approximately 2 Seconds.

2. PRODUCT NUMBER CODE:

DS1041-05 - X X X X X X X

- Operating Life
1: 10,000 cycles
- Lock Support
X: Lockless Type
- Operating force
200: 200gf
- Packing type
A: polybag
- Actuator color
T: Transparent
- Housing color
K: Black
- Profile Height
010:10.0mm
- No. of contacts
6: 6 pos

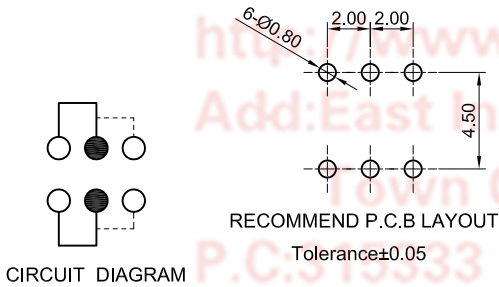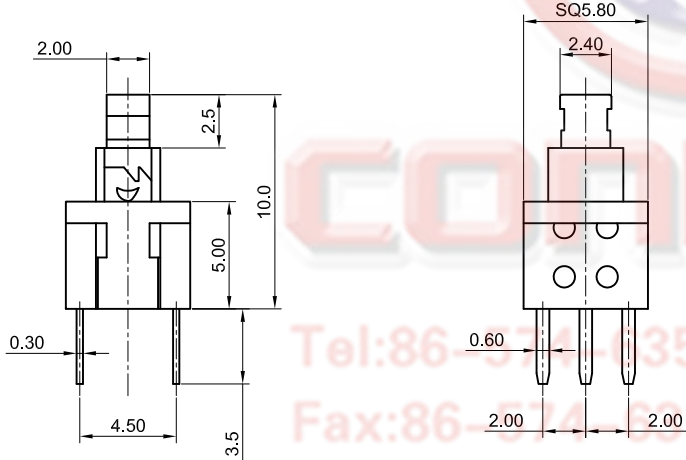

CONNELY
 Tel:86-574-83508787
 Fax:86-574-82510817
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Cixi Ningbo China
 P.C.815333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	5.8*5.8*10mm Lockless Switch 6P DIP Type	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1041-05 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.		C-DS1041-05-XXXXXXXX-A						

1 2 3 4 5 6 7 8