

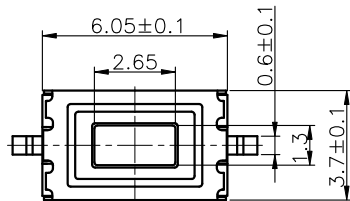


NOTES:

1. SPECIFICATIONS

- . Switch Function: Single Pole Single Throw
- . Contact Rating: 50mA at 12Vdc
- . Insulation Resistance:100MΩ min.
- . Contact Resistance:100mΩ max.
- . Operating Life:50,000 cycles
- . Stop Strength: Place The Switch Such That Vertical, A Static Load Of 3Kgf Shall Be Applied In The Direction
- . Operation Temperature Range: -25°C to +70°C



Recommend PCB layout  
Tolerance±0.05

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 11/05/15'		


- . Wave Soldering: Recommended Solder Temperature At 500°f(260°C)max. 5 Seconds,Subject To PCB 1.6mm Thickness.
- . Hand Soldering: Use Soldering Iron Of 30 Watts,Controlled At 608°f(320°C)Approximately 2 Seconds.

2. PRODUCT NUMBER CODE:

DS1042-06 - X X X X X X X

- Operating Life  
5: 50000 cycles  
10: 100000 cycles
- Operating force  
130: 130gf 160: 160gf  
170: 170gf 250: 250gf
- Packing type  
A: polybag  
B: tube  
R: tape & reel
- Actuator color  
W: white
- Housing color  
K: black
- Profile Height  
1:2.5mm
- Size  
1: 3.7mm\*6mm

CIRCUIT DIAGRAM



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	TACT SWITCH SMT TYPE 3.7mmX6mm	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1042-06	
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1042-06-1XXXXXX-A						