

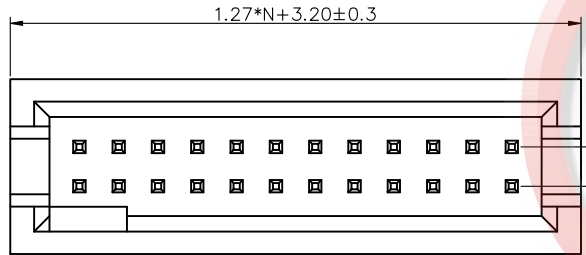


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'	~	LJC 09/04/08'
B	HOUSING CHANGE	JLZ 06/27/15'	HZW 06/27/15'	LJC 06/27/15'
C	DRAWING UPDATE	JLZ 01/31/18'	~	



N=No.OF CONTACTS/2

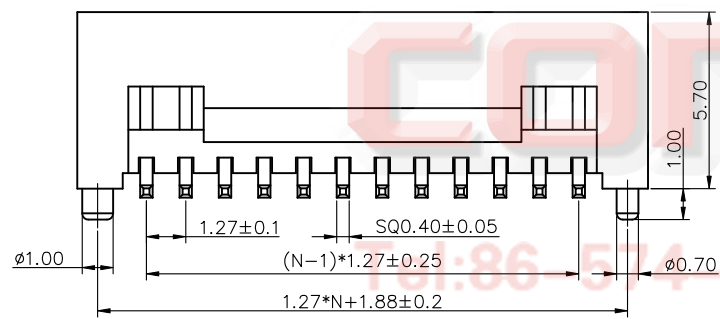


NOTES:

- MATERIAL
 - INSULATOR: THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING: 1.0 Amp.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - DIELECTRIC WITHSTANDING: 300VAC.
 - CONTACT RESISTANCE: 20mΩ Max.
 - OPERATING TEMPERATURE: -40°C TO+105°C.
- PART NUMBER: DS1064-14
- PRODUCT NUMBER CODE:

DS1064-14 - X X X X X - X

- PLATING LEVEL
3A: 3A LEVEL
- PACKING TYPE
B: TUBE
R: TAPE ON REEL
- HOUSING COLOR
B: BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
6: FULL TIN
- MOUNTING TYPE
S: SMT TYPE
- No.OF CONTACTS
06 08 10 14 20 24 26 30
32 34 40 44 50 60 64 80

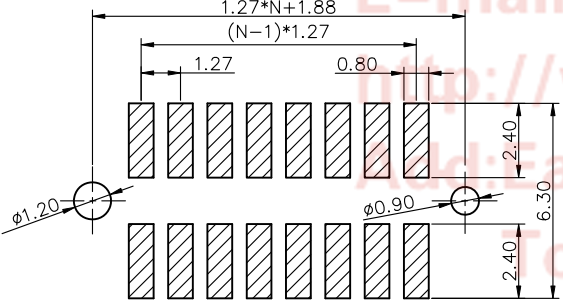


RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION	TITLE	1.27mm HEADER PITCH SMT TYPE W/POST	
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	DS1064-14 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1064-14-XXXXXX-X-C		


晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD