

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'	~	LJC 09/04/08'
B	HOUSING CHANGE	JLZ 07/06/15'	HZW 07/06/15'	LJC 07/06/15'
C	DRAWING UPDATE	JLZ 01/31/18'	~	

NOTES:




- MATERIAL
 - INSULATOR: THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING: 1.0 Amp.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - DIELECTRIC WITHSTANDING: 300VAC.
 - CONTACT RESISTANCE: 20mΩ Max.
 - OPERATING TEMPERATURE: -40°C TO+105°C.

3. PART NUMBER: DS1064-15

4. PRODUCT NUMBER CODE:

DS1064-15 - X X X X X - X

- PLATING LEVEL
3A: 3A LEVEL
- PACKING TYPE
A: POLYBAG
B: TUBE
- HOUSING COLOR
B: BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
6: FULL TIN
- MOUNTING TYPE
V: STRAIGHT TYPE
- No. OF CONTACTS
06 08 10 14 20 24 26 30
32 34 40 44 50 60 64 80

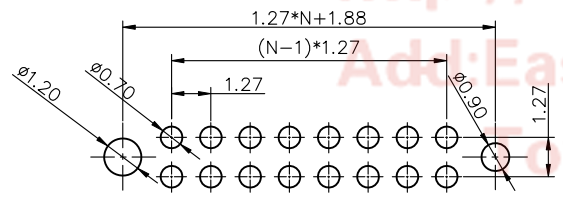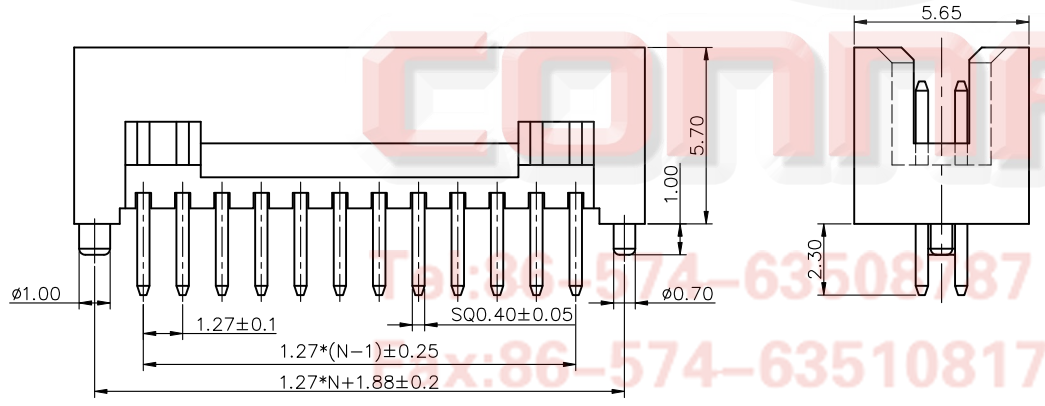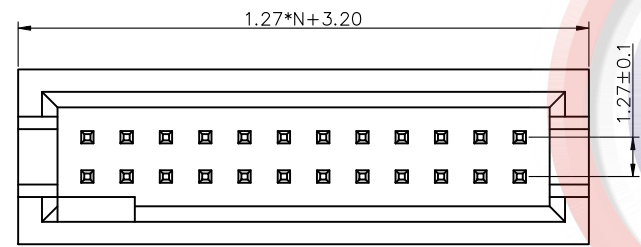

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	BOX HEADER PITCH 1.27mm		
X.	±0.60	X.	±5°	UNITS	mm		V/T TYPE		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1064-15 SERIES		
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
SCALE		1:1	SHEET 1 OF 1						
DRAWING NO.		C-DS1064-15-XXXXX-X-C							