REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 26/06/05		

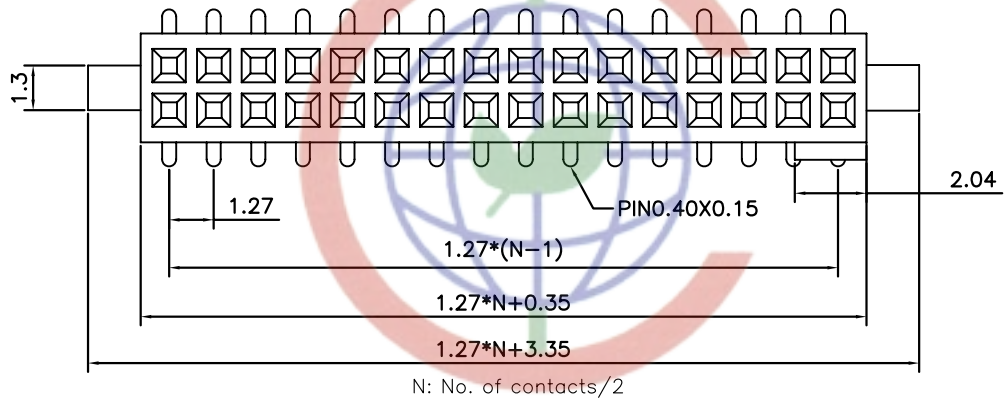

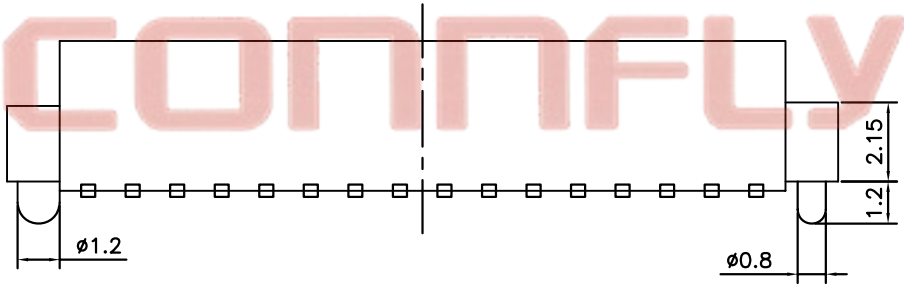

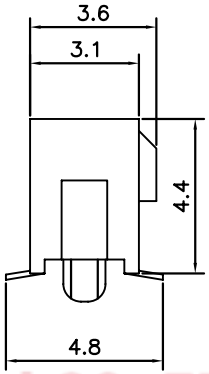

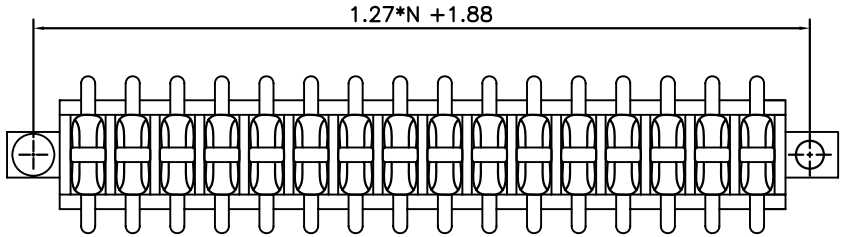

NOTES:

1. SPECIFICATIONS
   - . Current Rating: 1A
   - . Insulation Resistance: 500MΩ Min
   - . Dielectric Withstanding: 300V AC
   - . Contact Resistance: 30mΩ Max
   - . Operating Temperature: −40°C to+105°C
2. MATERIALS
   - . Contact Material: Copper alloy
   - . Insulator: Thermoplastic(UL94 V−0)
3. PART NUMBER: DS1065−06
4. PRODUCT NUMBER CODE:

DS1065−06 − X X X X X

- MOUNTING TYPE
  S:SMT TYPE
- HOUSING COLOR
  B:BLACK
- CONTACT PLATING
  8: FULL GOLD FLASH
- CONNECTOR TYPE
  S:SOCKET
- No.OF CONTACTS
  2*1−2*40

CONNFLY
Tel:86−574−63508787
Fax:86−574−63510817
E−mail:sale@zhenqin.com.cn
Http://www.connfly.com
Add:East Industry Zone Kengyan
Town Cixi Ningbo China
Post:315333

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C−DS1065−06−XXXXX		

PROJECTION		TITLE	FEMALE HEADER PITCH 1.27mm TYPE WITH POLARIZATION AND LOCAL PEG S.M.T
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1065−06

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD