



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/11/16'		

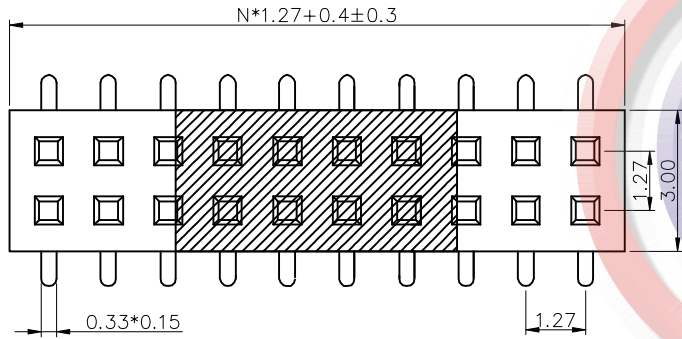

- NOTES:
- SPECIFICATIONS
 - Current Rating: 1A
 - Insulation Resistance: 500MΩ Min
 - Dielectric Withstanding: 300V AC
 - Contact Resistance: 30mΩ Max
 - Operating Temperature: -40°C to +105°C
 - MATERIALS
 - Contact Material: Copper alloy
 - Insulator: Thermoplastic(UL94 V-0)
 - PRODUCT NUMBER CODE:

DS1065-21 - X X X X X X X

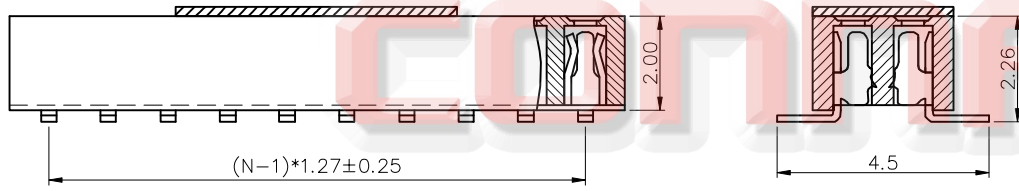

- PACKING TYPE
 - B: TUBE (FOR W/O MYLAR)
 - R: TAPE ON REEL
- PICK UP SUPPORT
 - M: MYLAR
 - X: W/O MYLAR
- MOUNTING TYPE
 - S: SMT TYPE
- HOUSING COLOR
 - B: BLACK
- CONTACT PLATING
 - 8: FULL GOLD FLASH
- CONNECTOR TYPE
 - S: SOCKET
- No. OF CONTACTS
 - 2*2-2*40

N=No. of contacts/2



RECOMMEND PCB LAYOUT

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Civi Ningbo China
 P.C:315336

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	1.27mm Female Header SMT Type H=2.0mm	
X.	±0.60	X.	±5°	UNITS	mm		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1065-21
.XX	±0.25	.XX	±2°				
DRAWING TYPE: CUSTOMER							
SCALE		1:1	SHEET		1 OF 1		
DRAWING NO.		C-DS1065-21-XXXXX-A					

 晨翔电子有限公司
 CONNFLY CONNFLY ELECTRONIC CO. LTD