


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/11/21'		

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

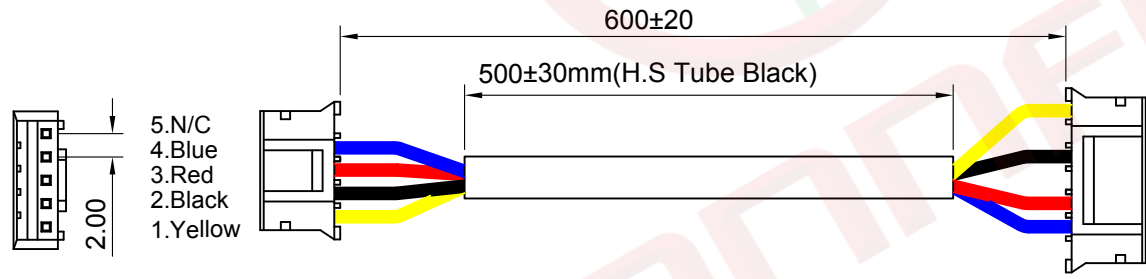

NOTES:

- MAIN SPECIFICATIONS
  - . Housing material: NYLON 66
  - . Contact material: COPPER ALLOY
  - . Wire range: AWG#26
  - . Rated voltage: 250V
  - . Rated current: 1A
  - . Contact resistance: 300mΩ Max
  - . Insulation resistance: 500MΩ Min
  - . Withstanding voltage: 500V,AC 1 minute
  - . Temperature range: -25 ~ +80°C

2. PRODUCT NUMBER CODE:

DS1066-02 - X X X X X X X - ELTECH - 044

- Wire length(DIM.L)  
600: 600mm.....
- Contact Plating  
6: Tin  
Housing Color  
W: White
- Mounting type  
C: Crimp
- Wire range  
24: UL1007 24AWG
- Connector type  
F: Female
- No. of contact  
4

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.0mm PH With Crimp Wire Type	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1066-02 SERIES	
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNFLY CONNELY ELECTRONIC CO. LTD</b>				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1066-02-XXXXXX-A						

FOR ELTECH ONLY