


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 04/16/21'		

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights (including but not limited to patents, trademarks, copyrights, trade secrets, and know-how) are reserved exclusively by CONNPLY. All intellectual property rights of CONNPLY are hereby asserted, and does not constitute a waiver of such rights, in any format or manner. CONNPLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

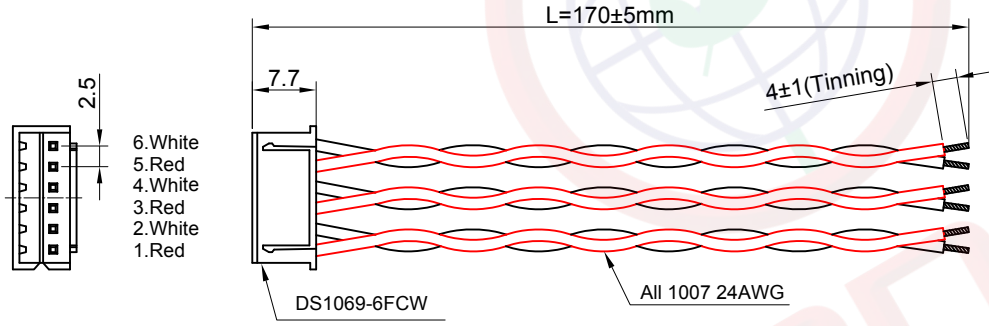

- Notes:
- Specifications:
- Contact Resistance: 200mΩ Max.
 - Insulation Resistance: 500MΩ Min.
 - Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
 - Current Rating: 1.5A.
 - Temperature: -25°C~+80°C.

- Materials:
- Contact Material: Copper Alloy.
 - Contact Plating: Tin Plating Over Nickel.
 - Insulator Material: Pa66,White.
 - Wire:UL1007 24AWG

Product Number Code:
 DS1069-05 - X X X X X X X - ELTECH - 043

- Length(DIM L): 170: 170mm
- Housing color W:White
- Contact plating 6: Tin
- Mounting type C: Crimp
- Wire gauge 24: UL1007 AWG #24
- Connector type F: Female
- No.of contacts 6

FOR ELTECH ONLY

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1069-05-XXXXX-A		

PROJECTION		TITLE	2.5mm XH Type W/ Crimp Wire Type
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1069-05 SERIES

晨翔电子有限公司
 CONNPLY CONNPLY ELECTRONIC CO. LTD