


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or modification is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failure or delays to exercise such rights does not constitute a waiver of such rights.

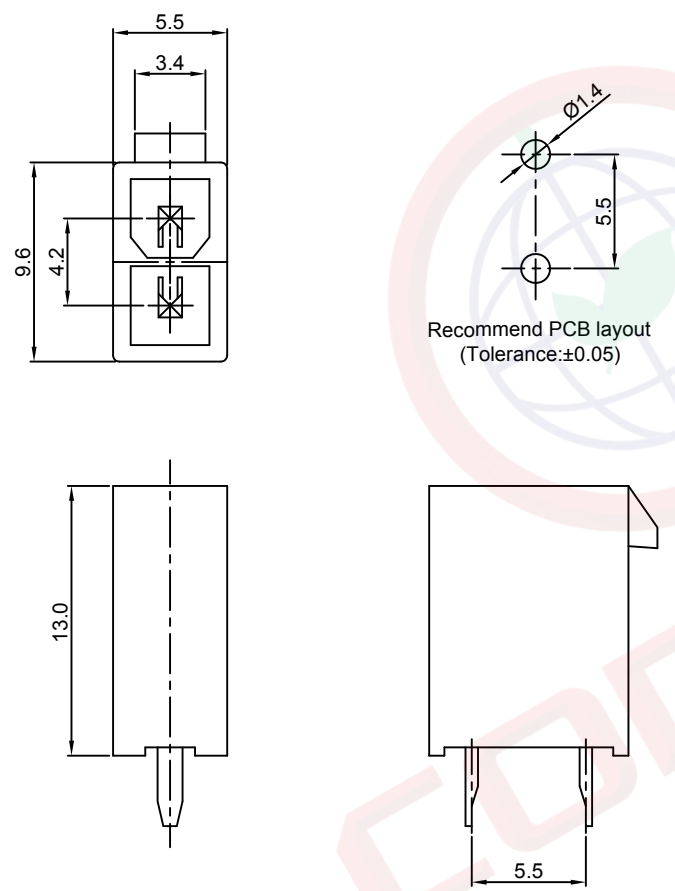

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 04/23/21'		

NOTES:
 Specifications:
 1. Contact resistance: 30mΩ Max.
 2. Insulation resistance: 1000MΩ Min.
 3. Dielectric withstanding voltage: 1000V AC(Rms) for 1 minute.
 4. Current rating:7A.
 5. Temperature: -25°C~+85°C.
 Materials:
 1. Contact material: Copper alloy.
 2. Contact plating: Tin plating over nickel.
 3. Insulator material: Nylon,Transparent .

Product number code:
 DS1073-01 - X X X X X
 Contact plating
 6: Tin
 Housing color
 T:Transparent
 Mounting type
 V: V/T type
 Connector type
 M:Male
 No. of contacts
 2x1

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	4.2mm Connector DIP type	
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1073-01 SERIES	
.X	±0.38	.X	±3°					
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1073-01-XXXXX-A						