

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY reserves the right to make changes to this document without notice and to exercise such rights as it deems necessary. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/16/20'		

- NOTES:
- Main specifications
 - . Housing material: Nylon 66
 - . Contact material: Copper alloy
 - . Wire range: AWG#22
 - . Rated voltage: 250V
 - . Rated current: 2A
 - . Contact resistance: 500mΩ Max
 - . Insulation resistance: 500MΩ Min
 - . Withstanding voltage: 1000V, AC 1 minute
 - . Temperature range: -25 ~ +80°C

2. PRODUCT NUMBER CODE:
 DS1073-03 - X X X X X X - ELTECH - 042

- Wire length(DIM.L)
500: 500mm.....
- Contact Plating
6: Tin
- Housing Color
B: Black
- Mounting type
C: Crimp
- Wire range
22: 1007 22AWG
- Connector type
F: Female
- No.of contact
12

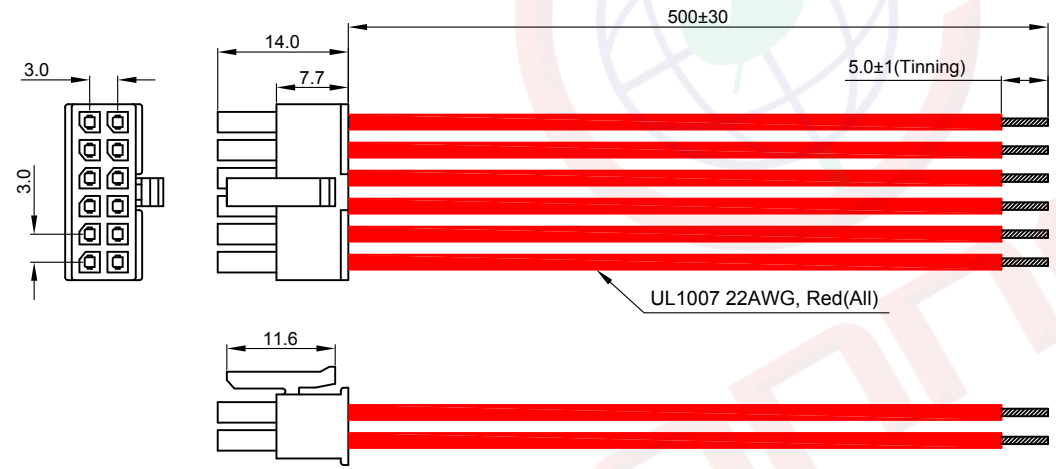

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1073-03-XXXXX-ELTECH-042-A		

PROJECTION		TITLE	3.00mm Connector With Crimp Wire Type
UNITS	mm	SERIES	DS1073-03 SERIES

FOR ELTECH ONLY

晨翔电子有限公司
 CONNELY CONNELY ELECTRONIC CO. LTD