


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

P/N Code:DS1073-1FC16L-800-3239

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/27/23'		

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights reserved herein are the property of CONNFLY Electronic Co., Ltd. and are not to be used, copied, reproduced, transmitted, or otherwise disclosed in any form or by any means without the prior written consent of CONNFLY Electronic Co., Ltd. All intellectual property rights of CONNFLY Electronic Co., Ltd. are hereby reserved. CONNFLY Electronic Co., Ltd. does not constitute a waiver of such rights, in whole or in part, for any purpose, and does not constitute a waiver of such rights, in whole or in part, for any purpose, and does not constitute a waiver of such rights, in whole or in part, for any purpose.

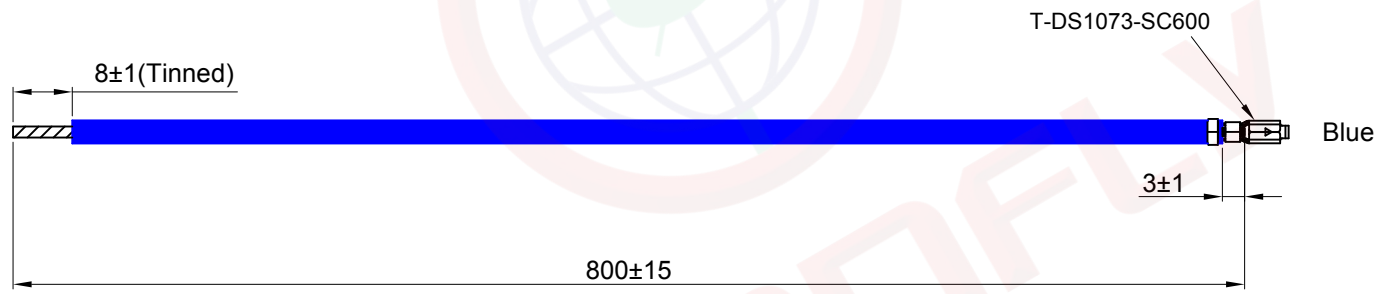

Notes:

Specifications:

1. Contact Resistance: 100mΩ Max.
2. Insulation Resistance: 100MΩ Min.
3. Dielectric Withstanding Voltage: 1000V AC(rms) For 1 Minute.
4. Current Rating:9A.
5. Temperature: -60°C~+180°C.

Materials:

1. Contact Material: Copper Alloy.
2. Contact Plating: Tin Plating Over Nickel.
3. Wire:UL3239 16AWG.

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	3.96mm Contacts W/ Crimp Wire Type	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1073 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.		C-DS1073-XXXXXX-A						