


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

P/N Code:DS1073-3FC16-700-2464

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/26/23'		

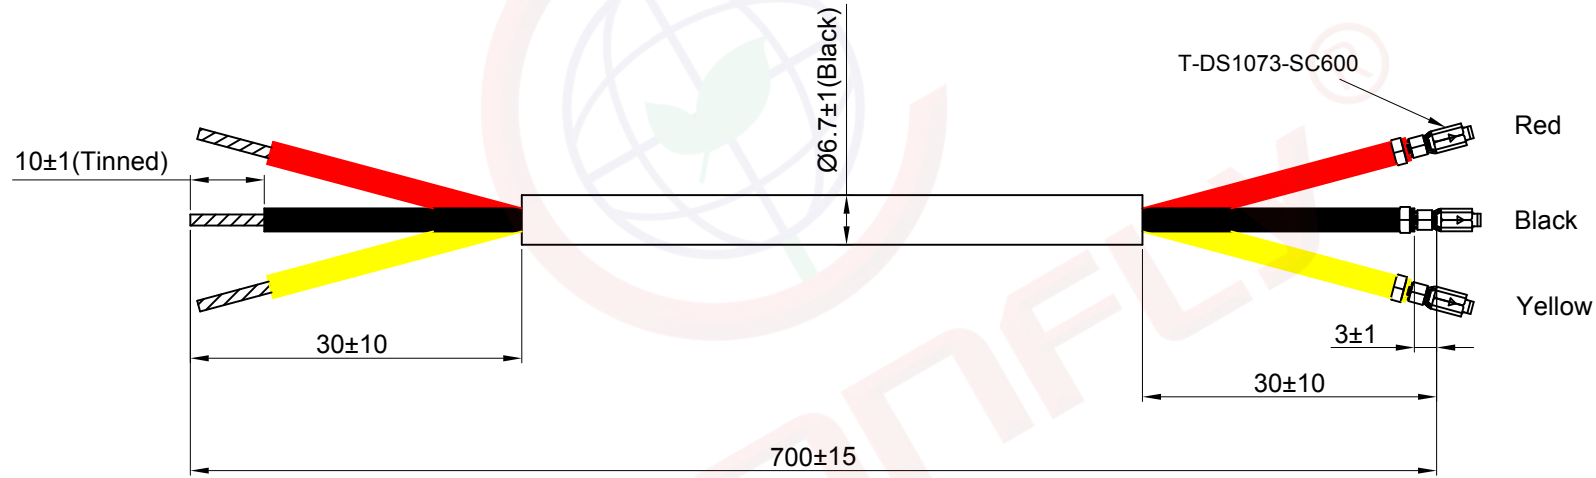

Notes:

Specifications:

1. Contact Resistance: 100mΩ Max.
2. Insulation Resistance: 100MΩ Min.
3. Dielectric Withstanding Voltage: 1000V AC(rms) For 1 Minute.
4. Current Rating:9A.
5. Temperature: -25°C~+80°C.

Materials:

1. Contact Material: Copper Alloy.
2. Contact Plating: Tin Plating Over Nickel.
3. Wire:UL2464 16AWG.

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	3.96mm Contacts W/ Crimp Wire Type	
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1073 SERIES	
.X	±0.38	.X	±3°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.		C-DS1073-XXXXXX-A						

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights reserved herein include but not limited to patents, trademarks, trade secrets, know-how, etc. are exclusively owned by CONNFLY. All rights reserved. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights, its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.