


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 12/02/06'		

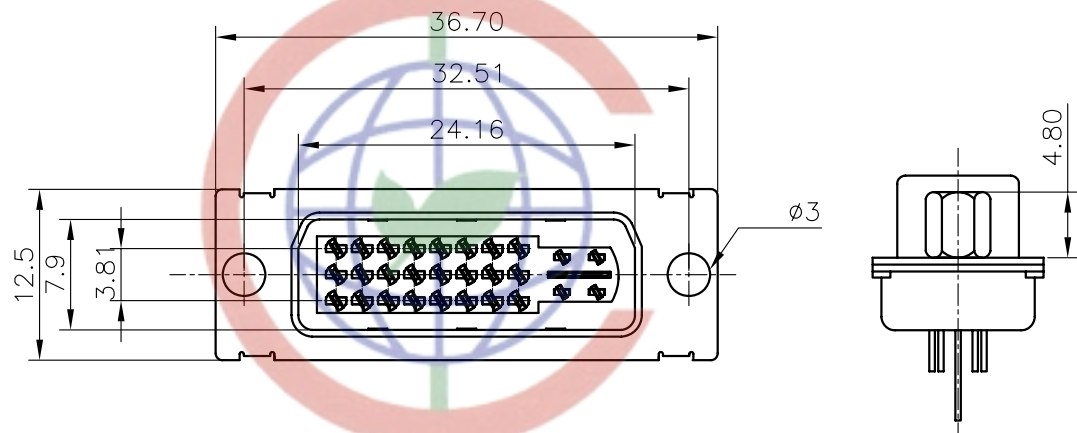

#4-40(UNC) SCREW

NOTES:

1. SPECIFICATIONS

- Contact Resistance: 30mΩ max
- Insulation Resistance: 1000MΩ min.
- Current Rating: 1A
- Dielectric withstanding voltage: AC 500V For 1 minute
- Contact: Copper alloy.
- Housing: Thermoplastic(UL 94V-0)
- Resistance to soldering heat: 260±5°C 5±0.5s.

2. PRODUCT NUMBER CODE:

DS1089 - X X X X

SCREW TYPE

X:W/O SCREW

S:W/ #4-40(UNC) SCREW

0: Selective gold flash

Shell plating

N: Front shell Nickel,Back shell Tin



T: Front & back shell Tin

Color of housing

W: WHITE

K: BLACK

V: Ivory

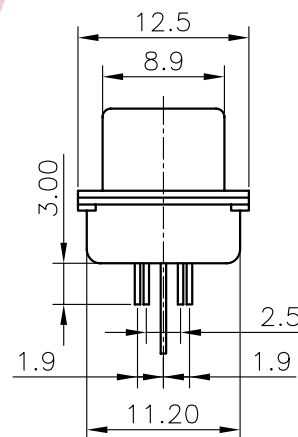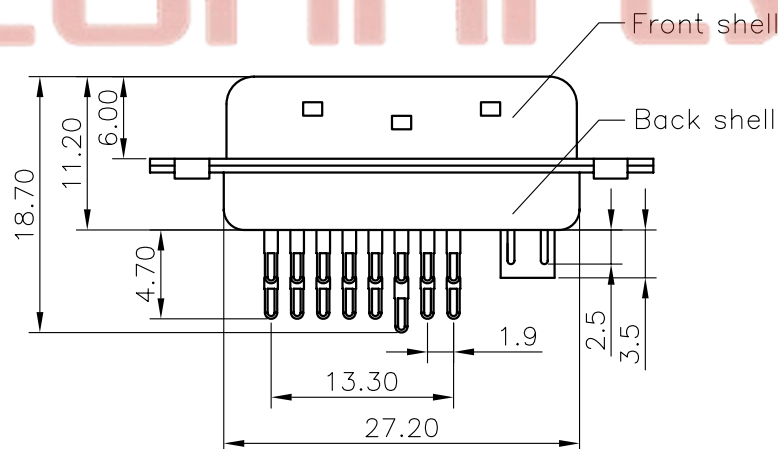

Tel: 86-574-63508787

Fax: 86-574-63510817

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION				TITLE					
X. ±0.60		X. ±5°		UNITS		mm		DVI PLUG 24+5					
.X ±0.38		.X ±3°		SHEET SIZE		A4		SERIES					
.XX ±0.25		.XX ±2°						DS1089 RoHS SERIES					
DRAWING TYPE		CUSTOMER				晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD							
SCALE		1:1								SHEET		1 OF 1	
DRAWING NO.		C-DS1089-XXXX											