


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/18/21'		

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use of this information for any purpose other than the intended purpose is strictly prohibited. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

NOTE:  
 1. Material: Spring Steel  
 2. Voltage rating: 5V.  
 3. Part Number Code:  
 DS1092-92 - X X X X

Packing type:  
 P: Polybag  
 Contact plating:  
 N: Nickel  
 Thickness:  
 0300: 0.30mm  
 Material:  
 FE: Spring Steel

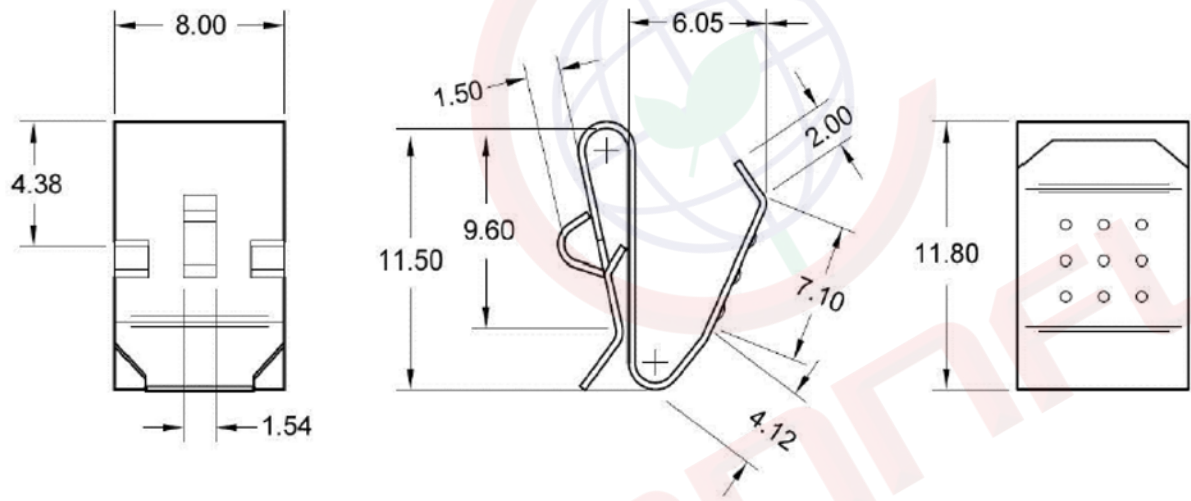

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	BC-209, Negative Battery Connector For A,AA,CR2,CR123A Battery		
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1092-92 SERIES		
.X	±0.38	.X	±3°	SHEET SIZE		A4			
.XX	±0.25	.XX	±2°	DRAWING TYPE		CUSTOMER			
SCALE		1:1	SHEET		1 OF 1		<b>晨翔电子有限公司</b> <b>CONNPLY ELECTRONIC CO. LTD</b>		
DRAWING NO.		C-DS1092-92-XXXX-A							