

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH11/16/05'		

NOTES:



1. SPECIFICATIONS:

- 1.0 VOLTAGE RATING: 30V DC.
- 1.1 CONTACT CURRENT RATING: 1A MAX. PER PIN.
- 1.2 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- 1.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
- 1.4 INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
- 1.5 OPERATING TEMPERATURE: -40°C~+105°C.


2. PRODUCT NUMBER CODE:

DS1093-05 - X X X X X


- Shell support
- X: W/O Shell
- S: W/ Shell
- Contact plating
- 0: Selective Gold Flash
- No.of contacts:
- 4: 4 pin
- 3: 3 pin
- Shell Plating:
- N: Nickel
- 6: Tin
- Color of housing
- B: Black
- Series No.
- DS1093-05

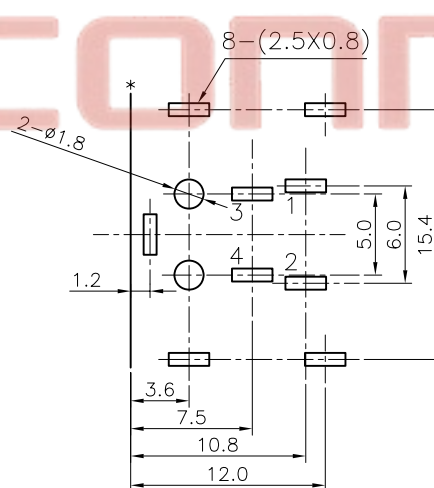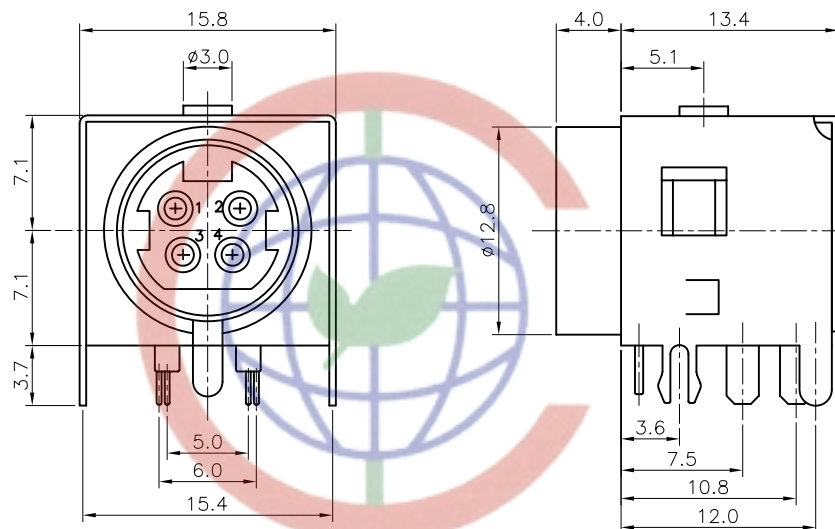

FOR 4PIN ONLY
RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

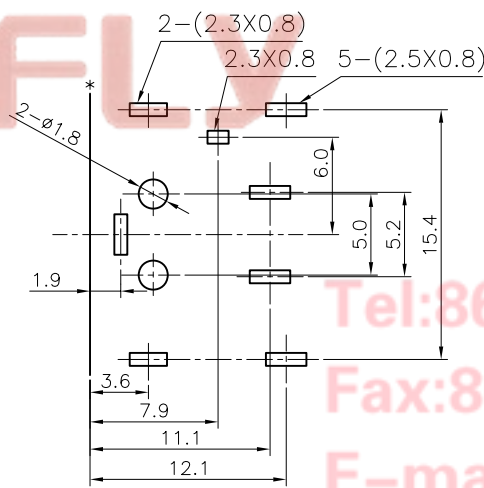

FOR 3PIN ONLY
RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)



3 pin

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE		
X. ±0.60		X. ±5°		UNITS	mm	MINI DIN 422 TYPE		
.X ±0.38		.X ±3°		SHEET SIZE	A4	SERIES	DS1093-05 SERIES	
.XX ±0.25		.XX ±2°						
DRAWING TYPE		CUSTOMER		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
SCALE		1:1	SHEET					1 OF 1
DRAWING NO.		C-DS1093-05-XXXXX						