REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/24/15'		

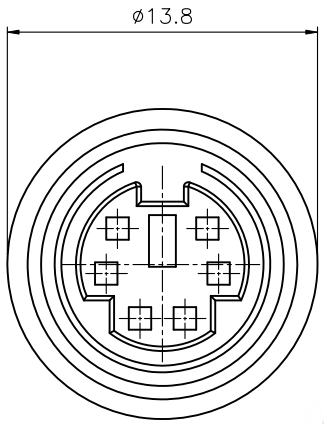

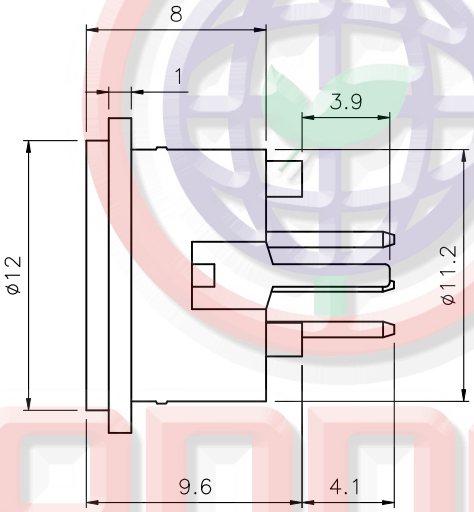

NOTES:

1. SPECIFICATIONS:
   1.0 VOLTAGE RATING: 12V DC 100V AC.
   1.1 CONTACT CURRENT RATING: 1A MAX. PER PIN.
   1.2 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
   1.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
   1.4 INSULATION RESISTANCE: 50 MEGAOHMS MIN.
   1.5 OPERATING TEMPERATURE: −20°C~+85°C.
2. PRODUCT NUMBER CODE:
   DS1093−09 − X X X X
   - Contact plating: 0: Selective Gold Flash; 6: Full Tin
   - No.of contacts: 3 4 5 6 7 8
   - Shell Plating: N: Nickel
   - Color of housing: B: Black

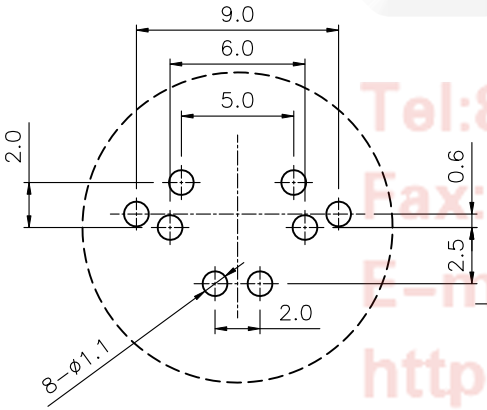

RECOMMENDED PCB LAYOUT
Tolerance=±0.05(6 pin)

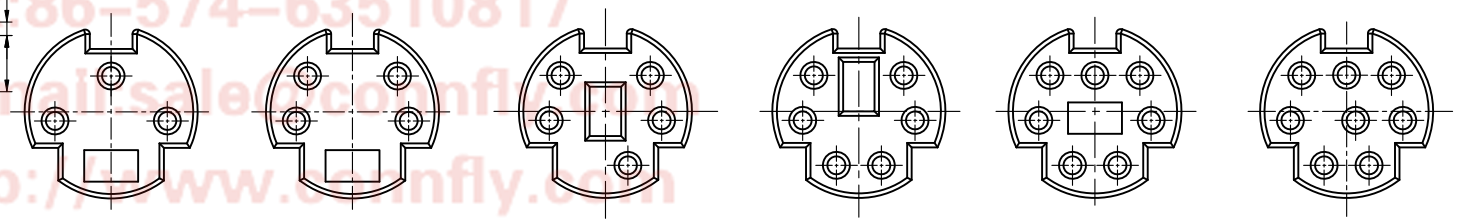

3 PIN 4 PIN 5 PIN 6 PIN 7 PIN 8 PIN

CONNFLY
Tel:86−574−63508787
Fax:86−574−63510817
E−mail:sale@connfly.com
http://www.connfly.com
Add:East Industry Zone KuangYan
Town Cixi Ningbo China
P.C:315333

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C−DS1093−09−XXXX−A		

PROJECTION		TITLE	MINI DIN SOCKET
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1093−09 SERIES

晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD