
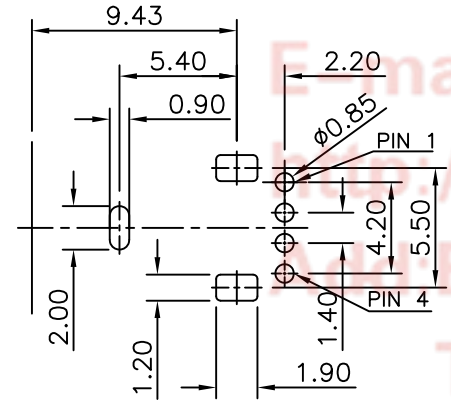
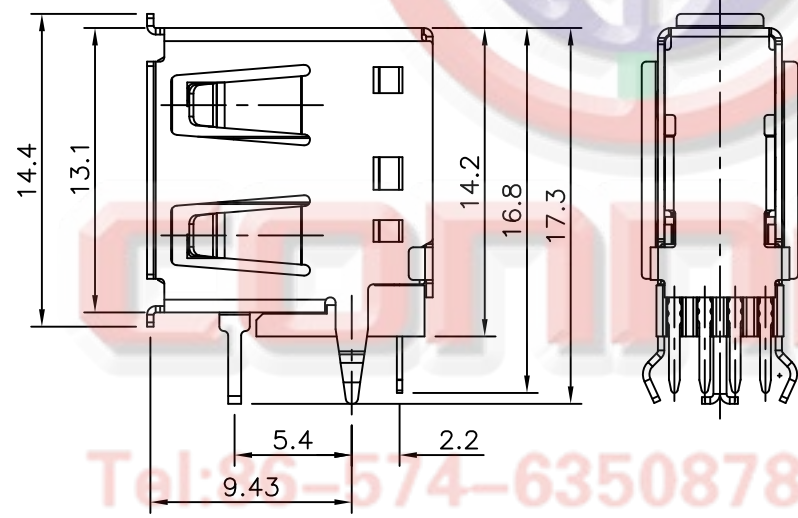
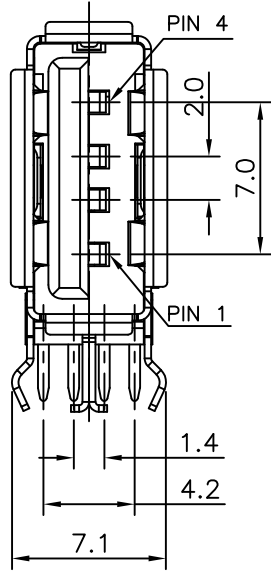


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/09/08'	~	LJC 08/09/08'
B	DRAWING UPDATE	JLZ 04/14/17'	~	

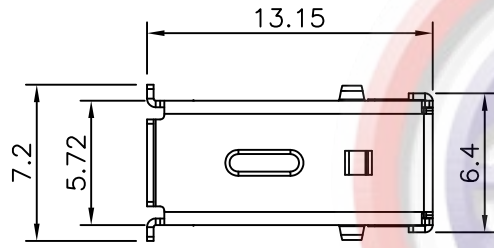

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

NOTES:

- SPECIFICATIONS:
 - CONTACT RESISTANCE: 30mΩ max.
 - INSULATOR RESISTANCE: 1000MΩ min.AT DC 500V.
 - CURRENT RATING: 1.5A.
 - VOLTAGE RATING: 30V AC/DC.
 - DIELECTRIC STRENGTH: AC 500V FOR 1 Minute.
 - TEMPERATURE RANGE: -40°C ~ +105°C .

2. MATERIALS:

- HOUSING: THERMOPLASTIC(UL94 V-0).
- CONTACT: COPPER ALLOY
- SHELL: COPPER ALLOY.

3. PRODUCT NUMBER CODE:

DS1095-07-X X X X


- CONTACT PLATING
 - 0: Selective gold flash
 - 03: Selective gold 3u"
 - 30: Selective gold 30u"
- MOUNTING TYPE
 - R: R/A
- SHELL PLATING:
 - N: Nickel
- COLOR OF HOUSING:
 - W: WHITE
 - B: Black
- SERIES No.
 - DS1095-07

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@connfly.com
 http://www.connfly.com
 East Industry Zone
 Town Cui Ningbo China
 P.C315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1095-07-XXRX-B

PROJECTION	TITLE
UNITS	mm
SHEET SIZE	A4
SERIES	DS1095-07 SERIES

 晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD