

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights. Its use in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 12/06/22'		

Notes:
 Specifications:
 1. Contact Resistance: 50mΩ Max.
 2. Insulation Resistance: 100MΩ Min.
 3. Dielectric Withstanding Voltage: 100V AC(rms) For 1 Minute.
 4. Current Rating:1.8A Max(VBUS & GND Pins)
 5. Voltage Rating:30V Max
 6. Temperature: -40°C~+85°C.
 Materials:
 1. Contact Material: Copper Alloy.
 2. Shell Material: Stainless Steel.
 3. Insulator Material: LCP,Black or Blue.
 Mechanical Characteristics:
 1. Mating Force:3.5Kgf Maximum.
 2. Unmating Force:1.02Kgf Minimum.
 3. Durability:1500 Cycles
 Product Number Code:

DS1095-28 - X X X X X

- X — Packing type
R: Tape on reel
- X — Contact plating
0: Selective gold flash
03: Selective gold 3u"
- X — Mounting type
M: SMT type
- X — Shell plating
N: Nickel
- X — Color of Housing
B: Black
U: Blue

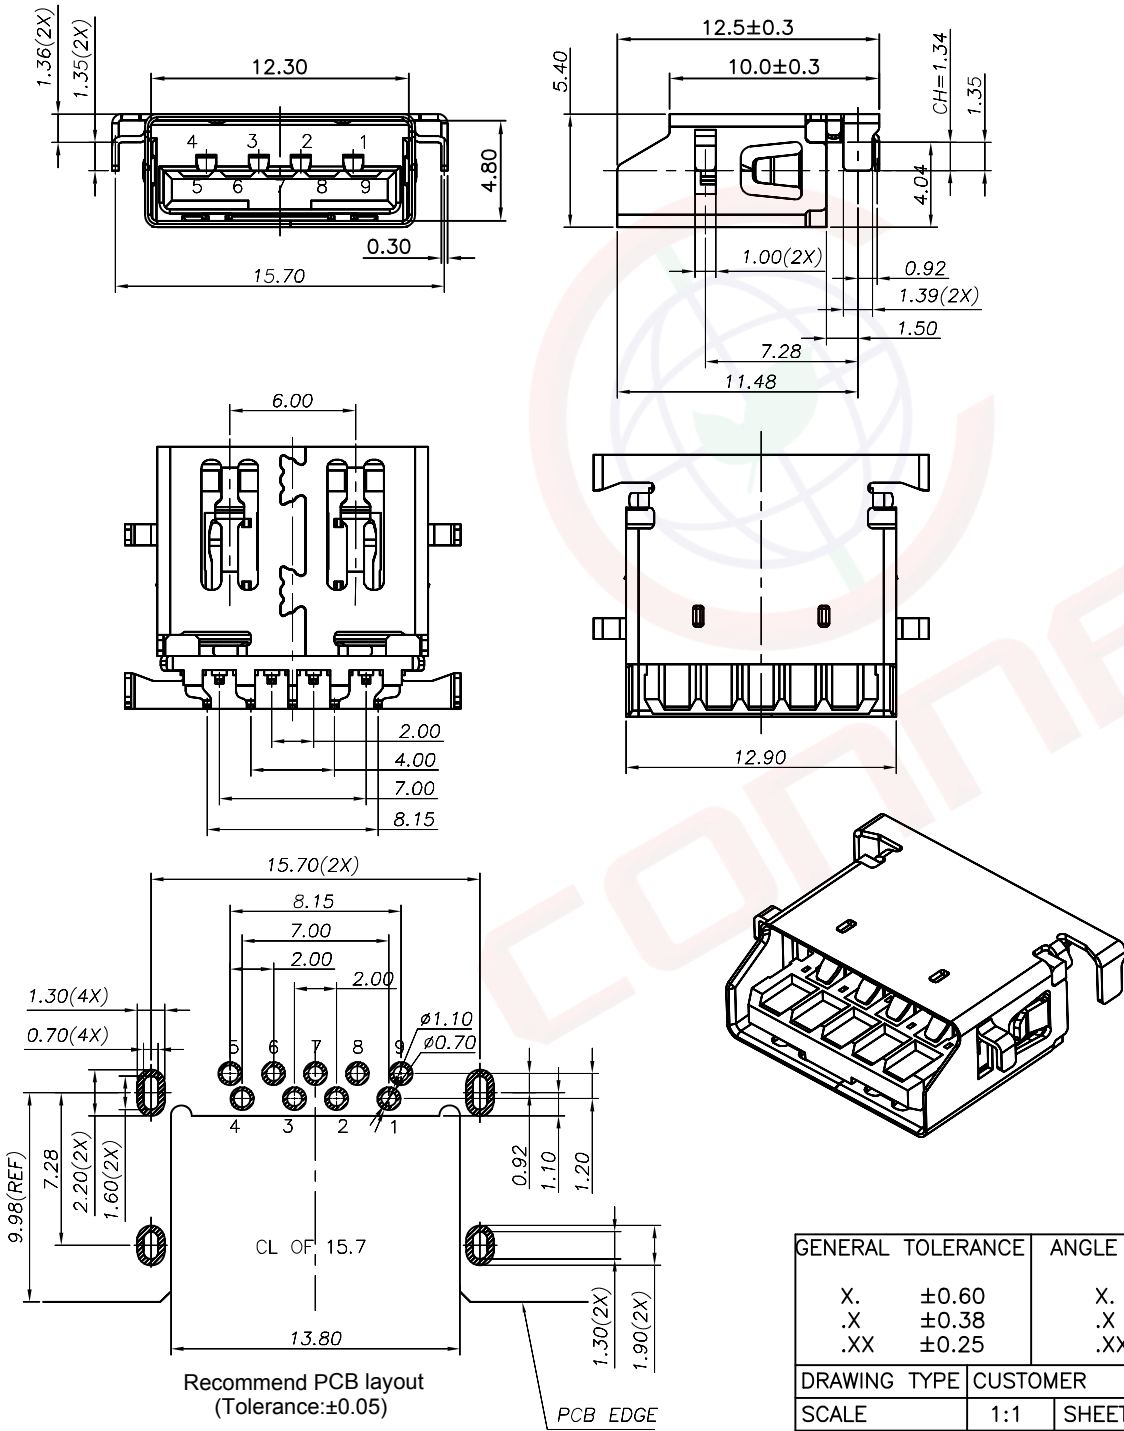

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1095-28-XXXXX-A		

PROJECTION	TITLE
	USB 3.0 Female Low Profile SMT Type
UNITS	mm
SHEET SIZE	A4
SERIES	DS1095-28 SERIES

晨翔电子有限公司
 CONNELY CONNELY ELECTRONIC CO. LTD