


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 07/25/14'	~	

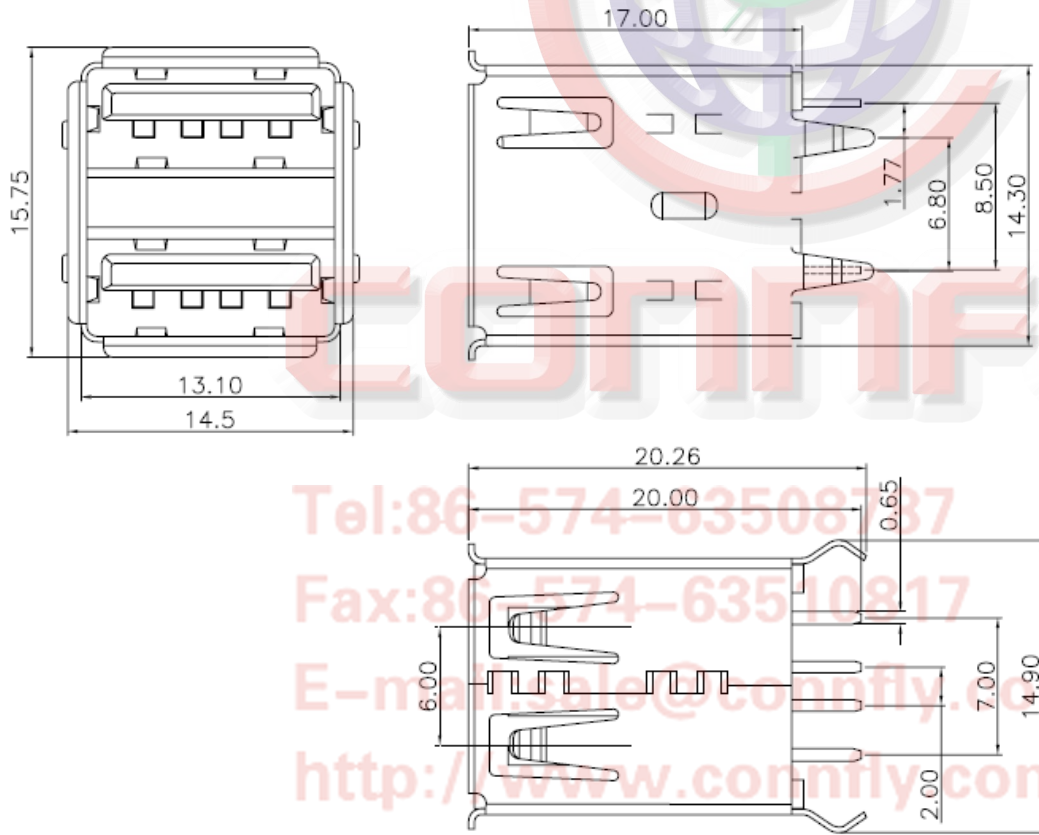

NOTES:

1. SPECIFICATIONS:

- 1.0 CONTACT RESISTANCE:30mΩ max.
- 1.1 INSULATOR RESISTANCE:1000MΩ min.AT DC 500V.
- 1.2 CURRENT RATING:1AMP.
- 1.3 VOLTAGE RATING:30VAC.
- 1.4 DIELECTRIC STRENGTH:AC 500V FOR 1 Minute.

2. MATERIALS:

- 2.0 HOUSING:PBT+30% GLASS FIBER(UL 94-0).
- 2.1 CONTACT:COPPER ALLOY
- 2.2 SHELL:COPPER ALLOY OR STEEL.

3. PRODUCT NUMBER CODE:

DS1096-02 - X X X - X

Shell Materials:
Fe: Steel
N/A: Copper Alloy

Contact Plated:
0: Selective Gold Flash
03: Selective Gold 3u"

Shell Plated:
N: Full Nickel
6: Full Tin

Color Of Housing:
W: White
K: Black

Tel:86-574-63508737

Fax:86-574-63510817

E-mail:sale@connfly.com

http://www.connfly.com

Add:East Industry Zone KuangYan

Town Cixi Ningbo China

P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	USB DUAL 8 PIN RECEPTLCE	
X.	±0.60	X.	±5'	UNITS	mm	180° TYPE		
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1096-02 SERIES	
.XX	±0.25	.XX	±2'	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1						
DRAWING NO.		C-DS1096-02-XXX-X-A						