
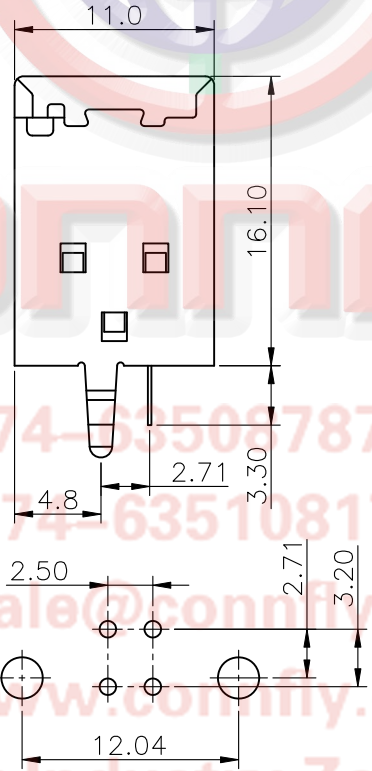

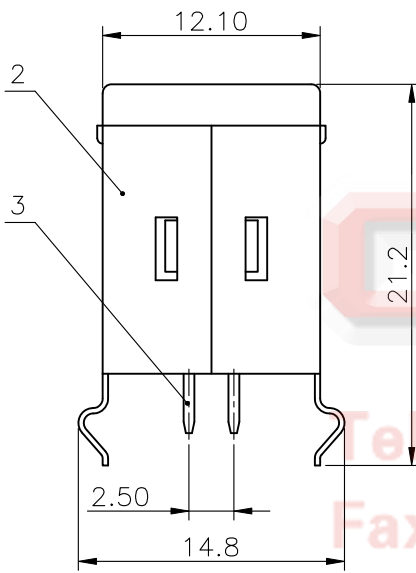


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 05/08/08'	~	LJC 05/08/08'
B	DRAWING UPDATE	JLZ 05/26/17'	~	

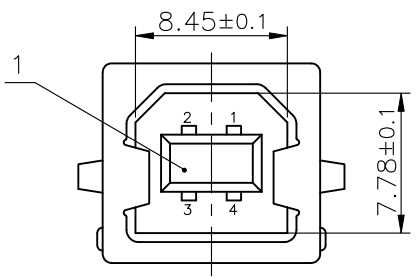

RECOMMEND PCB LAYOUT
TOLERANCE=±0.05

NOTES:

- SPECIFICATIONS:
 - CONTACT RESISTANCE:30mΩ max.
 - INSULATION RESISTANCE:1000MΩ min.
 - CURRENT RATING:1.5A.
 - VOLTAGE RATING:30VDC.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V FOR 1 Minute.
 - TEMPERATURE RANGE: -45°C ~ +110°C.

- MATERIALS:
 - HOUSING:PBT+30% GLASS FIBER(UL 94-0).
 - CONTACT:COPPER ALLOY
 - SHELL:COPPER ALLOY OR STEEL.

3. PRODUCT NUMBER CODE:

DS1099-01 - X X X - X

- MATERIALS OF SHELL
 - Fe: Steel
 - N/A Code: Copper Alloy
- CONTACT PLATING
 - 0: Selective Gold Flash
 - 03: Selective Gold 3u"
 - 30: Selective Gold 30u"
- SHELL PLATING
 - N: Nickel
 - 6: Tin
- COLOR OF HOUSING:
 - W: WHITE
 - B: BLACK
- SERIES No.
 - DS1099-01 series


Tel:86-574-63508787
Fax:86-574-63510817
E-mail:sale@connfly.com
http://www.connfly.com
Add:East Zone KuangYan
Town Civi Ningbo China
P C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
UNITS	mm
SHEET SIZE	A4
SERIES DS1099-01 SERIES	

ITEM	PART NAME	MATERILAS	FINISHED
3	CONTACT	COPPER ALLOY	SEE NOTES
2	SHELL	COPPER ALLOY/STEEL	SEE NOTES
1	HOUSING	PBT	UL 94 V-0

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	C-DS1099-01-XXX-X-B


晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD