


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights. Its use in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/20/20'		

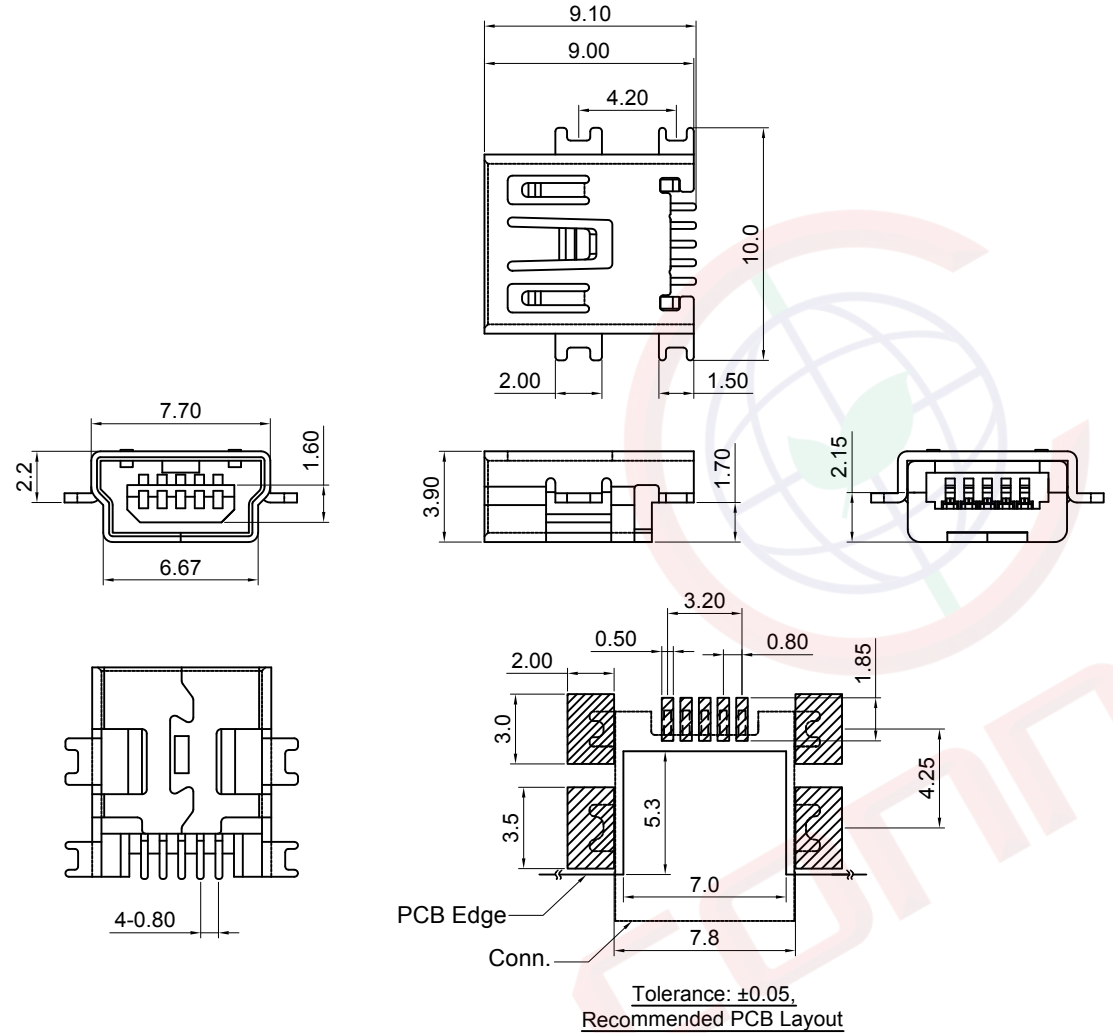

Notes:
 Specifications:
 1. Contact Resistance: 50mΩ Max.
 2. Insulation Resistance: 100MΩ Min.
 3. Dielectric Withstanding Voltage: 100V AC(rms) For 1 Minute.
 4. Current Rating: 1.0A Max
 5. Voltage Rating: 30V Max
 6. Temperature: -40°C~+85°C.
 Materials:
 1. Contact Material: Copper Alloy.
 2. Insulator Material: High temp, Black.
 3. Shell Material: Copper Alloy.
 Product Number Code:
 DS1104-08 - X X X X
 Packing type
 T: Tray
 R: Tape on reel
 Contact plating
 0: Selective gold flash
 03: Selective gold 3u"
 30: Selective gold 30u"
 Shell plated
 N: Nickel
 Color of housing
 B: Black

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Mini-USB Female 5 pos Mid-Mount SMT Type
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1104-08 SERIES
.X	±0.38	.X	±3°				
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNELY ELECTRONIC CO. LTD			
SCALE		1:1					
DRAWING NO.		C-DS1104-08-XXXX-A					
		SHEET	1 OF 1				