

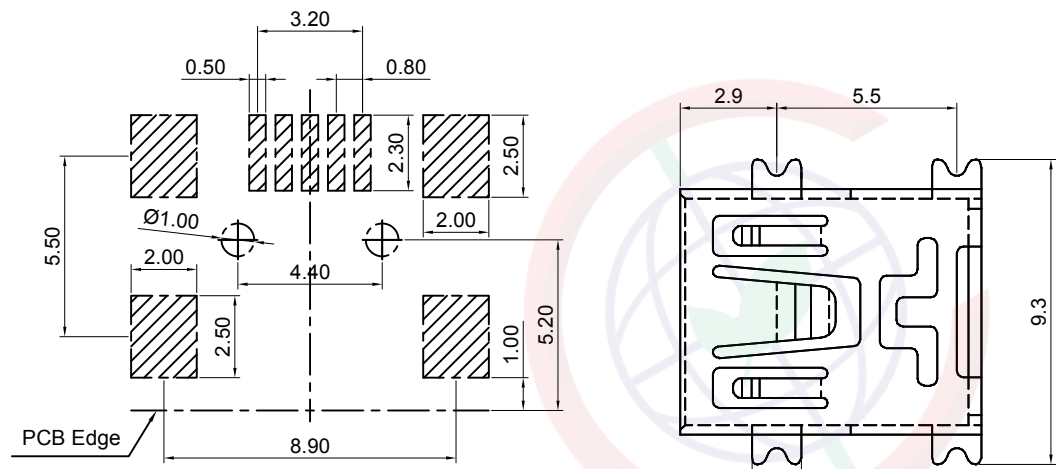


The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/08/21'		

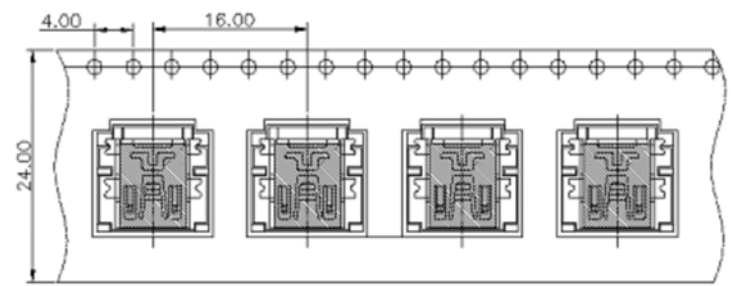

Tolerance: ± 0.05 ,
Recommended PCB Layout

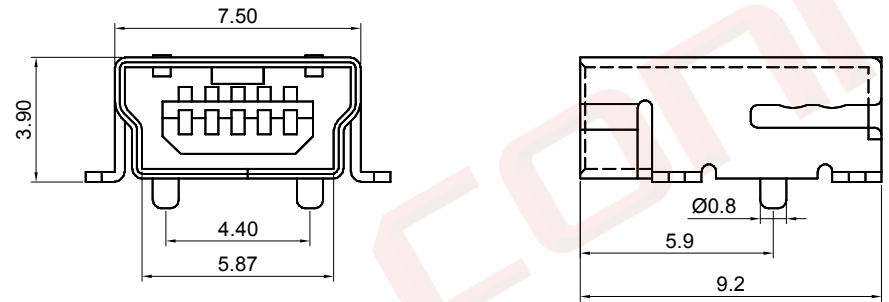

Tape On Reel

- Notes:
- Specifications:
- Contact Resistance: 50mΩ Max.
 - Insulation Resistance: 100MΩ Min.
 - Dielectric Withstanding Voltage: 100V AC(rms) For 1 Minute.
 - Current Rating: 1.0A Max
 - Voltage Rating: 30V Max
 - Temperature: -40°C~+85°C.
- Materials:
- Contact Material: Copper Alloy.
 - Insulator Material: Thermoplastic, Black.
 - Shell Material: Copper Alloy.
- Packing type: Tape on reel, Transparent, 750Pcs/R.
Product Number Code:

DS1104 - X X X X X X

- X — Post support
S: W/ Post
- X — Packing type
R: Tape on reel
- X — Mylar support
S: W/ Mylar
- X — Contact plating
0: Selective gold flash
- X — Shell plating
N: Nickel
- X — Color of housing
B: Black

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Mini-USB B Female 5 Positions SMT Type	
X.	± 0.60	X.	$\pm 5^\circ$	UNITS	mm	SERIES DS1104 SERIES		
.X	± 0.38	.X	$\pm 3^\circ$	SHEET SIZE A4		DRAWING NO. C-DS1104-XXXXXX-A		
.XX	± 0.25	.XX	$\pm 2^\circ$	DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNPLY ELECTRONIC CO. LTD
SCALE		1:1		SHEET		1 OF 1		