


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 04/09/15'	~	

- NOTES:
- 1.1 INSULATOR RESISTANCE: 100MΩ Min. AT 100V DC.
 - 1.2 CURRENT RATING: 1.8A FOR PIN1 AND PIN5.
 - 1.3 DIELECTRIC STRENGTH: AC 100V FOR 1 Minute.
 - 1.4 HOUSING: THERMOPLASTIC (UL 94-0).
 - 1.5 CONTACT: COPPER ALLOY
 - 1.6 SHELL: COPPER ALLOY
 - 1.7 PRODUCT NUMBER CODE:
DS1105-07 - X X X X X

- PACKING TYPE:
R: Tape on reel
B: Tube
- POST SUPPORT:
X: W/O Post
S: W/ Post
- CONTACT PLATED:
0: Selective Gold Flash
C: Selective Gold 3u"
- SHELL PLATED:
N: Nickel
6: Tin
8: Full Gold
- COLOR OF HOUSING:
B: Black

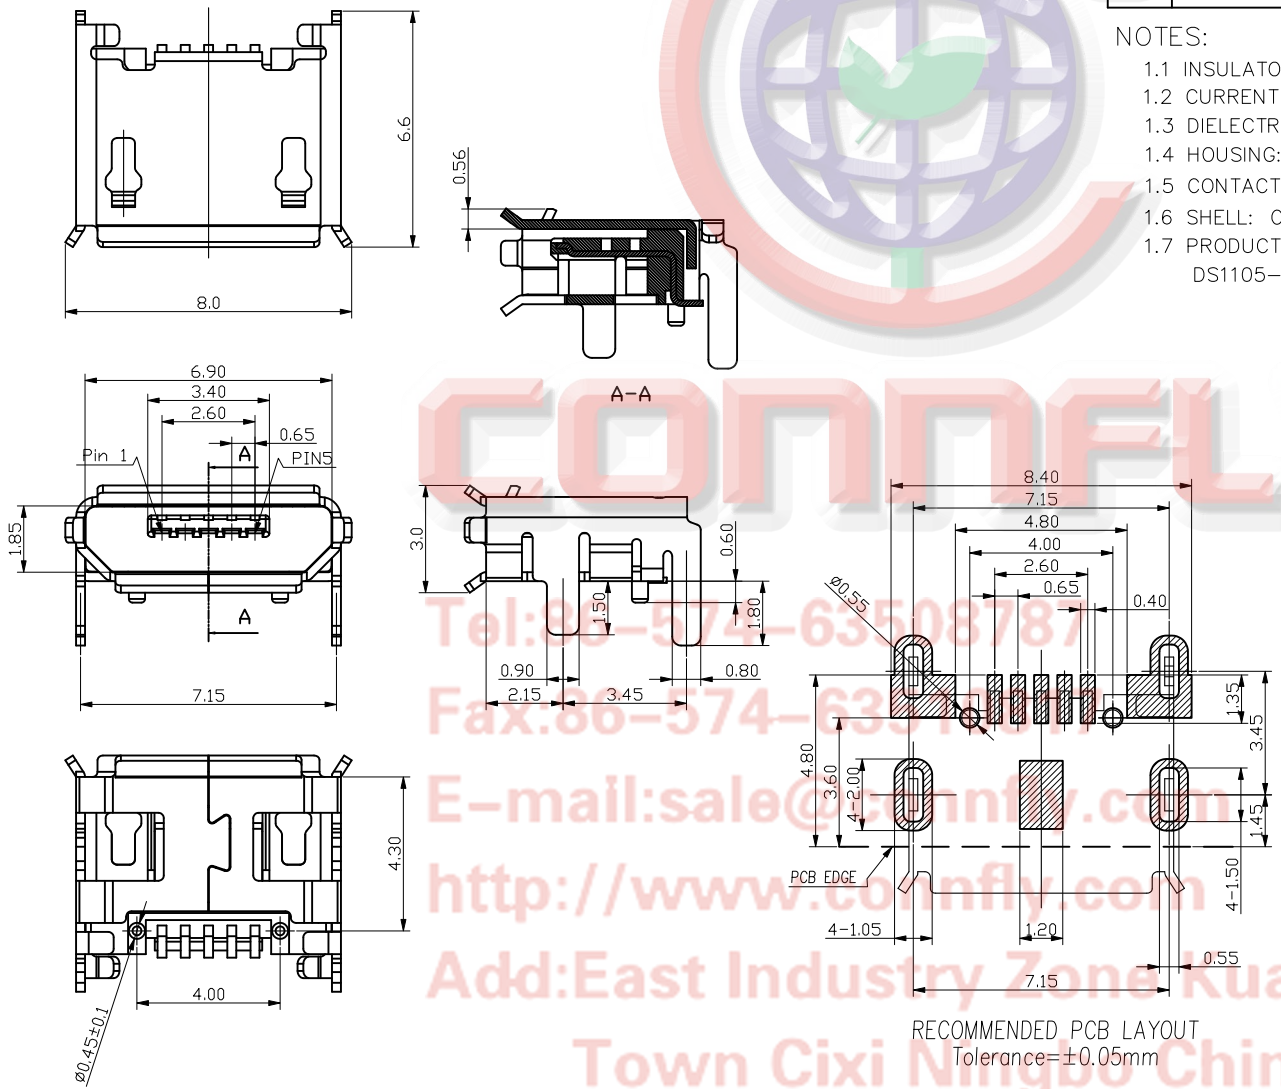

Tel: 86-574-63508787
 Fax: 86-574-63508787
 E-mail: sale@connfly.com
 http://www.connfly.com
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	MICRO USB B TYPE FEMALE
X.	±0.60	X.	±5°	UNITS	mm		5P DIP+R/A SMT W/ POST TYPE
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1105-07 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1105-07-XXXX-A						