

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/20/17'		

NOTES:


1.SPECIFICATION

- .CURRENT RATING: 5A~7A.
- .DIELECTRIC WITH STANDING VOLTAGE: 1000V(AC)
- .CONTACT RESISTANCE: 20mΩ Max.
- .INSULATION RESISTANCE: 1000MΩ(DC)Min


2.PRODUCT NUMBER CODE:

DS1110-20 - X X X X


- SHELL SURFACE FINISHED
N: Nickel
- CONTACT PLATING
6: Tin
- COLOR OF HOUSING:
B: Black
- No. OF CONTACTS
02: 2pin 03: 3pin
04: 4pin 05: 5pin
06: 6pin 07: 7pin
08: 8pin 09: 9pin
10: 10pin

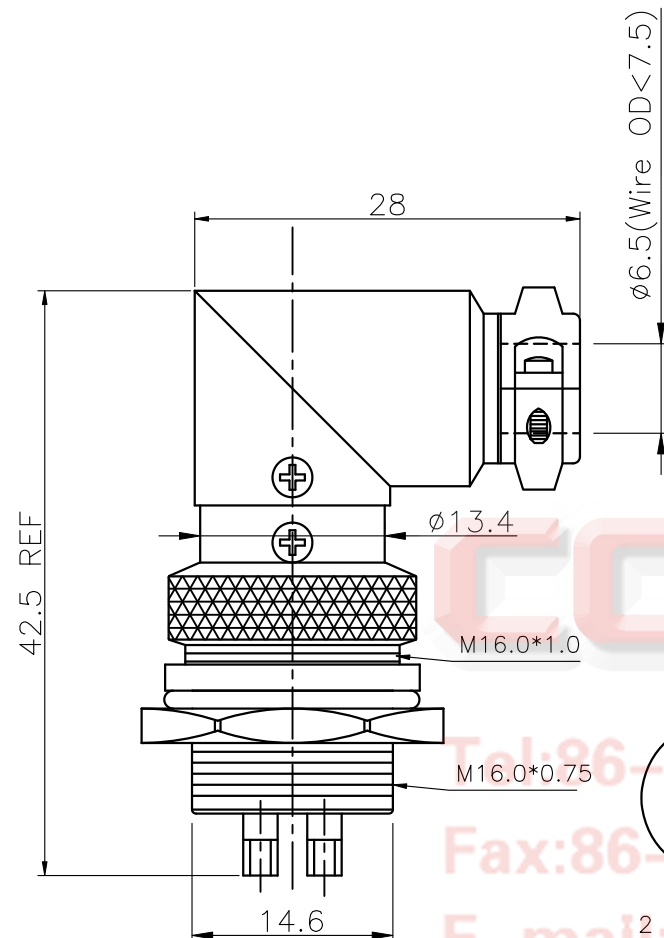


2 PIN(ø2.5 7A)




3 PIN(ø2.5 7A)



4 PIN(ø2.5 7A)




5 PIN(ø2.0 7A)




6 PIN(ø1.2 5A)




7 PIN(ø1.2 5A)



8 PIN(ø1.2 5A)



9 PIN(ø1.2 5A)



10 PIN(ø1.2 5A)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	UNIT	TITLE	Micro Jack Total Length=42.5mm Ref (Pin Ø1.2~2.5) R/A Threaded Type	
X.	±0.60	X.	±5°	mm				
.X	±0.38	.X	±3°					
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER		SHEET SIZE		SERIES	DS1110-20 SERIES	
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	C-DS1110-20-XXXX-A							



晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD