





The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

P/N Code: DS1120-96M0R43

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/05/23'		

NOTES:

- Specifications:
  - Contact Resistance: 20mΩ max.
  - Insulation Resistance: 1000MΩ min.
  - Current Rating: 2A.
  - Dielectric withstanding voltage: AC 1000V(r.m.s)/60s.
  - Operating Temperature: -40°C to +105°C
  - Recommend Wave Soldering Temperature: 250°C,3-5s.
- Materials:
  - Contact: Copper alloy, Selective gold flash.
  - Housing: PBT, Gray, UL94 V-0.

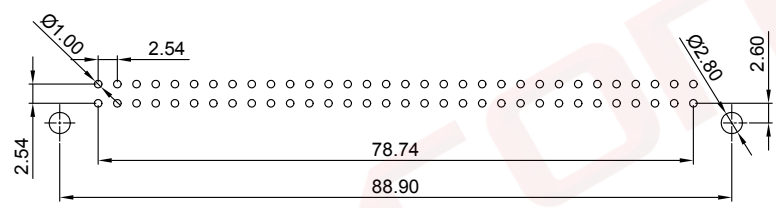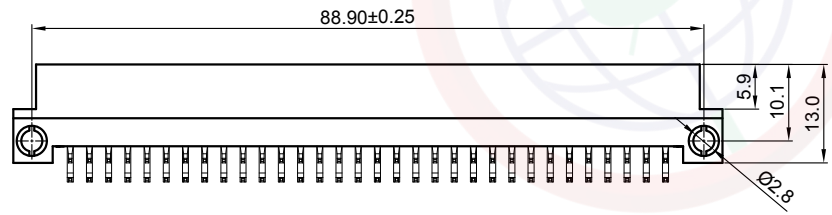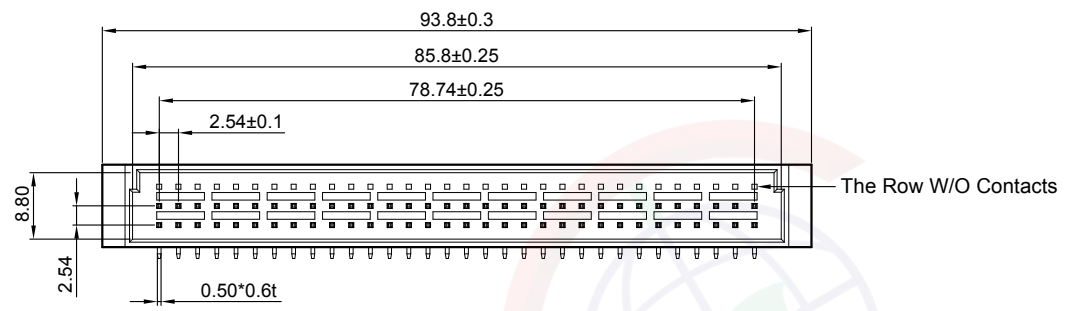

Recommend PCB layout  
Tolerance: ±0.05mm

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1120-XXXXX-A	

PROJECTION		TITLE	DIN 41612 R Type 3 Row
UNITS	mm	SERIES	DS1120 SERIES
SHEET SIZE	A4		

**晨翔电子有限公司**  
 CONNELY CONNELY ELECTRONIC CO. LTD