
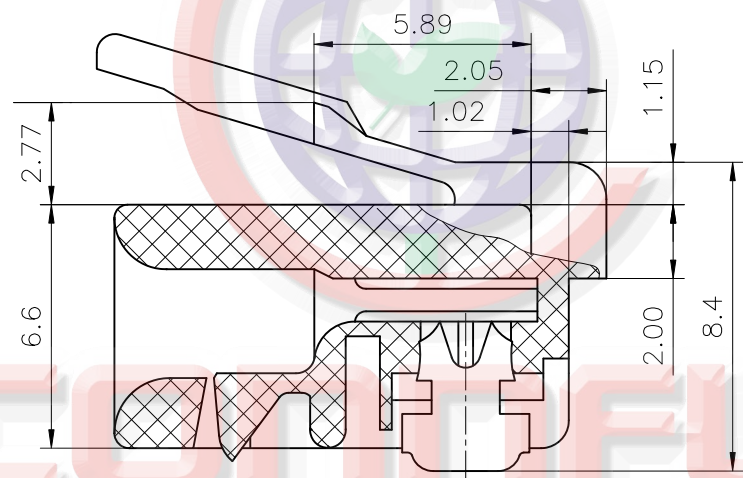


1	2	3	4	5	6	7	8
REV.	DESCRIPTION	DRAWN		CHECKED	APPROVED		
A	NEW RELEASE	LJH 03/01/06'					

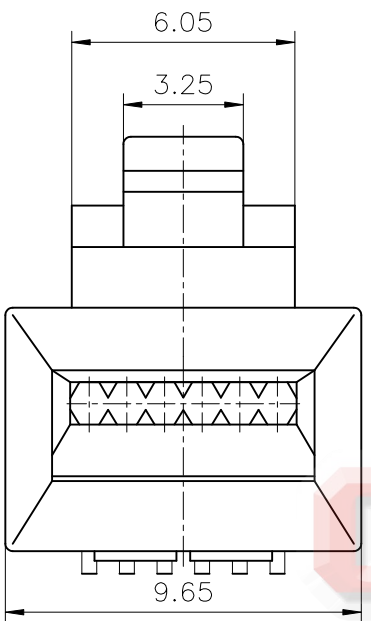

SECTION A-A


SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Cycles Min.
4. Contact resistance:50mΩ max.
5. Operating Temperature: -25°C~+55°C.
6. Product Number Code:


DS1122 - X X X X

- Housing Color
T:Transparent
- Contact Plating
0:Gold Flash 15:15u''Au
3:3u''Au 30:30u''Au
6:6u''Au
- No.Of Contacts
6:6p6c
- Connector Type
P:Plug
- Series No.
DS1122

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C:315333

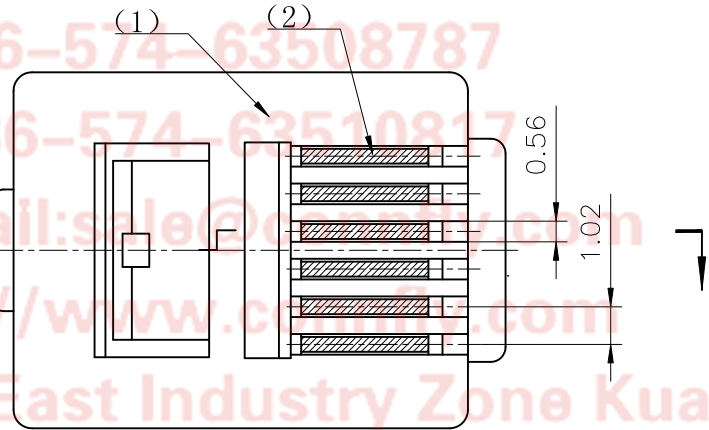

				GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
				X. ±0.60	X. ±5'		UNITS		Plug 6P6C SQUARE TYPE		
				.X ±0.38	X. ±3'		SHEET SIZE		A4 SERIES DS1122 SERIES		
				.XX ±0.25	.XX ±2'						
(2)	BLADE	6	Copper alloy	GOLD PLATING		DRAWING TYPE		CUSTOMER			
(1)	HOUSING	1	PC	UL94 V-0 OR 94 V-2		SCALE		1:1 SHEET 1 OF 1			
No.	PART NAME	Q'TY	MATERIAL	REMARK		DRAWING NO.		C-DS1122-XXXX			

 **晨翔电子有限公司**
CONNFLY CONNFLY ELECTRONIC CO. LTD