
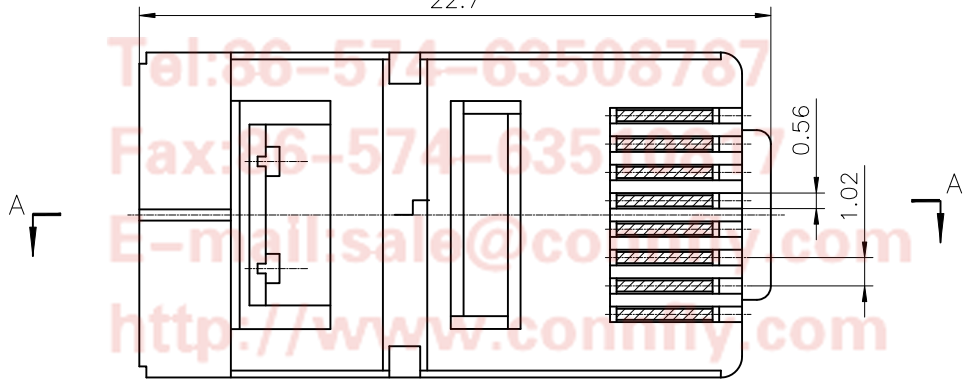
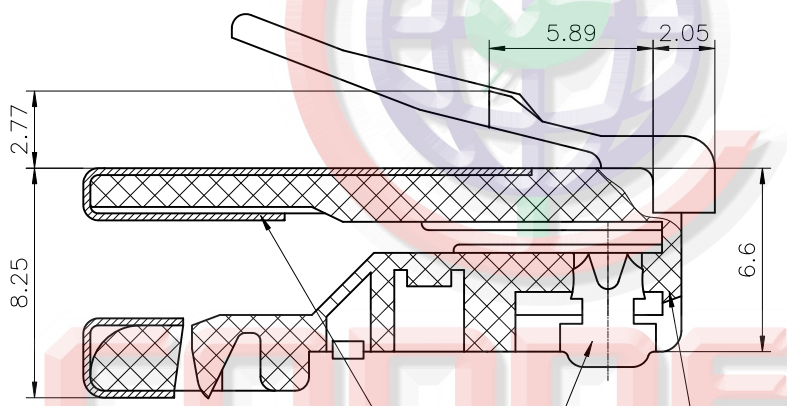


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/23/07'	~	LJC 08/23/07'
B	DRAWING UPDATE	JLZ 05/17/17'	~	

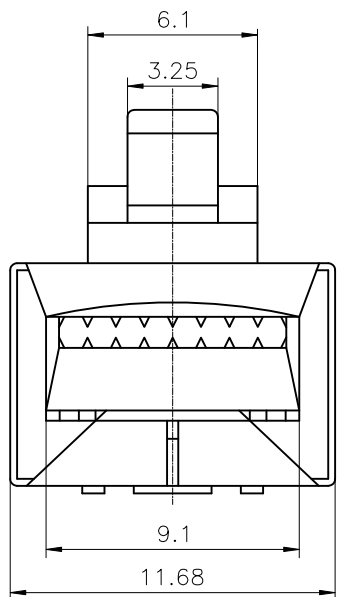

SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Cycles Min.
4. Contact resistance:50mΩ max.
5. Operating Temperature: -25°C~+55°C.
6. Product Number Code:

- DS1123-15 - X X X X X
- Shell plating
N:Nickel
 - Housing Color
T:Transparent
 - Contact Plating
0:Gold Flash 15:15u''Au
3:3u''Au 30:30u''Au
6:6u''Au
 - No.Of Contacts
8:8p8c
 - Connector Type
P:Plug
 - Series No.
DS1123-15

Tel:86-574-63508787
 Fax:86-574-63508787
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China

No.	PART NAME	Q'TY	MATERIAL	REMARK
(3)	SHELL	1	Copper alloy	NICKEL PLATING
(2)	BLADE	8	Copper alloy	GOLD PLATING
(1)	HOUSING	1	PC	UL94 V-0 OR 94 V-2

GENERAL TOLERANCE		ANGLE TOLERANCE	
.X	±0.60	.X	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1123-15-XXXX-B	

PROJECTION	TITLE
	PLUG 8P8C ROUND WITH SHELL TYPE
UNITS	mm
SHEET SIZE	A4
SERIES	DS1123-15 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD