
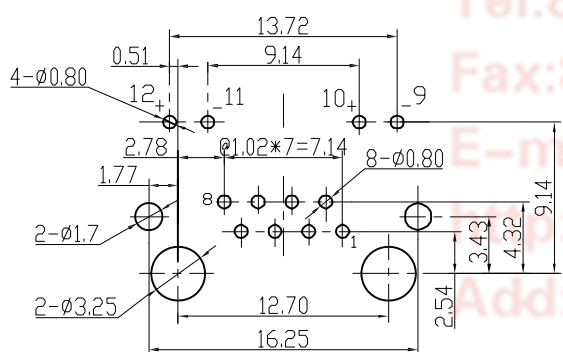
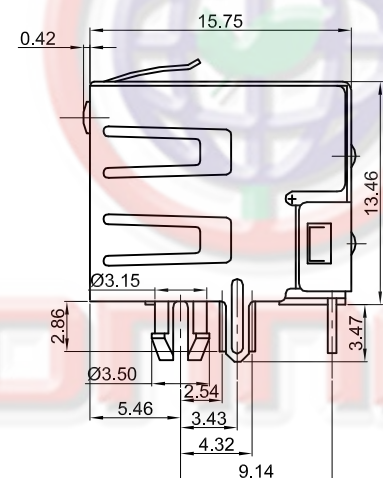


Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QF 1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|----------------|---------------|---------------|---------------|
| A | NEW RELEASE | JLZ 11/10/14' | HZW 11/10/14' | LJC 11/10/14' |
| B | DRAWING UPDATE | JLZ 03/28/19' | | |
| | | | | |

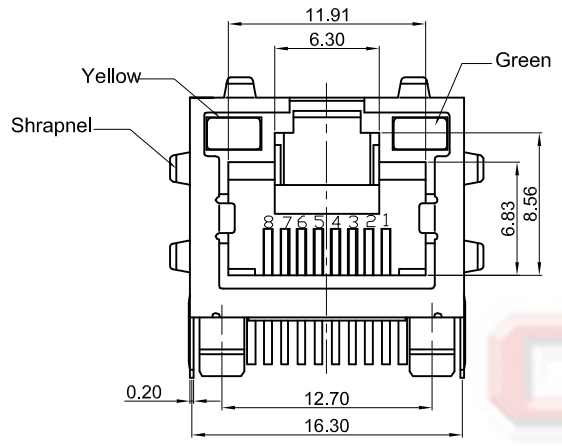

PCB LAYOUT
THICKNESS=1.6mm
LED Voltage=2.6V

Notes:

- Electrical Characteristics:
 - Contact Resistance: 20mΩ Max.
 - Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
 - Insulation Resistance: 1000MΩ Min.
 - Current Rating: 1.5A.
 - Voltage Rating: 150V AC rms.
- Environment Characteristics:
 - Temperature: -40°C~+85°C.
- Materials:
 - Contact Material: Copper Alloy.
 - Contact Plating: Seclective Gold Flash.
 - Insulator Materials: PBT, UL94-V0.
- Product Number Code:

DS1128-03-X X X X - X

- Shell Type
X:W/O Shrapnel
S:W/ Shrapnel
- Housing Color
B:Black
- Contact Plating
0:Selective Gold Flash
- No.Of Contacts
8:8p8c
- Connector Type
S:Socket

| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | TITLE |
|-------------------|-------|----------------------|-----|---|----------------------------|
| X. | ±0.60 | X. | ±5° | | PCB JACK 8P 1PORT WITH LED |
| .X | ±0.38 | .X | ±3° | mm | |
| .XX | ±0.25 | .XX | ±2° | A4 | SERIES DS1128-03 SERIES |
| DRAWING TYPE | | CUSTOMER | | 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD | |
| SCALE | | 1:1 SHEET 1 OF 1 | | | |
| DRAWING NO. | | C-DS1128-03-XXXX-X-B | | | |