

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 07/20/12'		

NOTES:

1.Materials:

1.1. Insulator: High Temperature 260°C,UL94-V0
(For White Only UL94-HB Rated).RoHS,REACH compliance.

1.2. Pin: Copper Alloy, Plating Tin or Gold.

1.3. Clip: Beryllium Copper, C17200,Full Gold plating.

2.Specifications:

2.1. Temperature Range: -55~+125°C.

2.2. Contact Resistance: 10mΩ maximum.

2.3. Insulation Resistance: 1000MΩ minimum.

2.4. Dielectric Withstanding Voltage: 500V AC 1 minute.

2.5. Voltage Rating: 100V AC/DC.

2.6. Current Rating: 1A max per pin.

2.7. Application insert pin: Ø0.45~Ø0.60mm.

2.8. Resistance to soldering heat: 260°C,3-5seconds.

2.9. Durability: 1000 cycles min.

3. Product Number Code:

DS1137-02 - X X X X X X X

Packing Type
R: Tape On Reel.

Clip plating(Female Only)
8: Full gold flash.
C: Full 3u" gold.

Pin plating
6: Full tin.
8: Full gold flash.

Housing Color
W: White
B: Black
V: Ivory

Connector Type
F: Female
M: Male

No. of positions
2: 2p ~ 10: 10p






Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@zhenqin.com.cn

Http://www.connfly.com

Female

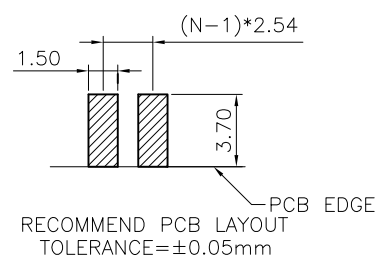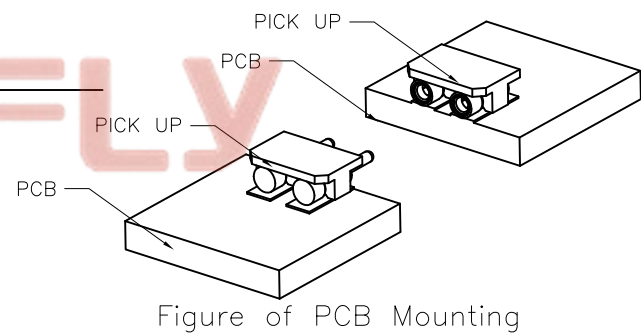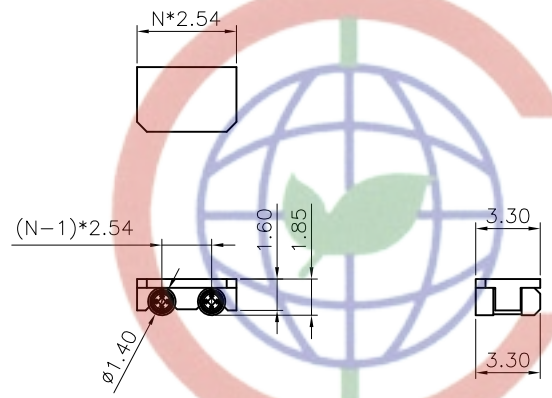

Male

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	2.54mm LED Series Plug & Socket SMT Type Connector H=1.85mm	
X.	±0.60	X.	±5°	mm			
.X	±0.38	.X	±3°	A4	SERIES	DS1137-02	SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE	CUSTOMER			 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1137-02-XXXXXX-A						