

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/07/14'		

Notes:

1.Material:

- 1.1. Housing: High Temperature LCP UL 94V-0 Color: Black.
- 2.1. 2. Contacts: Copper Alloy. Selective Gold Flash.

2.Specifications:

- 2.1. Operate Temperature: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$
- 2.2. Insulation Resistance: 1000M Ω Min.
- 2.3. Contact Resistance: 50m Ω max.
- 2.4. Withstanding Voltage: 500V AC 1min.
- 2.5. Voltage Rating: 30V AC/DC
- 2.6. Current Rating: 1.0A

3.Product Number Code:

DS1138-02 - XX X X X X 0 X

Packing Type
R: Tape On Reel


Housing color
B: Black

Contact Plating
4: Selective 3u" gold

Mounting type
S: SMT type

Connector type
S: Socket

No. of contacts
06:6pin

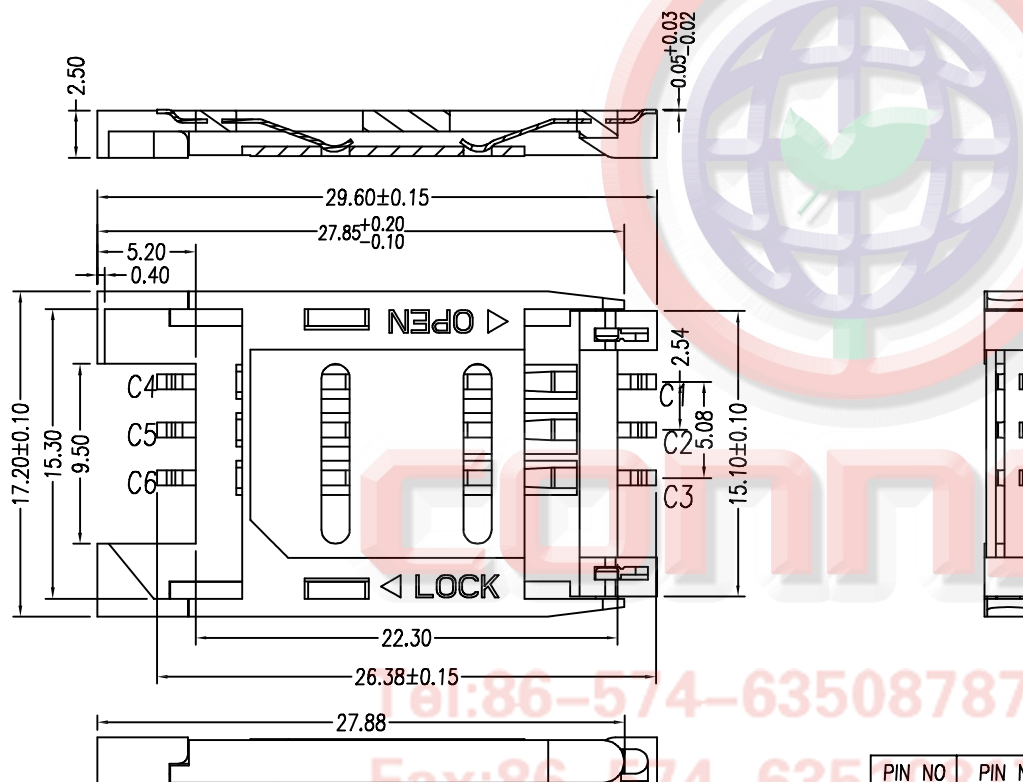

PIN NO	PIN NAME
C1	VCC
C2	RST
C3	CLK
C4	GND
C5	VPP
C6	I/O

Recommend Layout PCB

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1138-02-XXXXXXX		

PROJECTION		TITLE		2.54mm SIM Card H=2.5mm	
UNITS	mm			6 Positions SMT Type	
SHEET SIZE	A4	SERIES	DS1138-02 SERIES		
晨翔电子有限公司 CONNFLY® CONNFLY ELECTRONIC CO., LTD					