
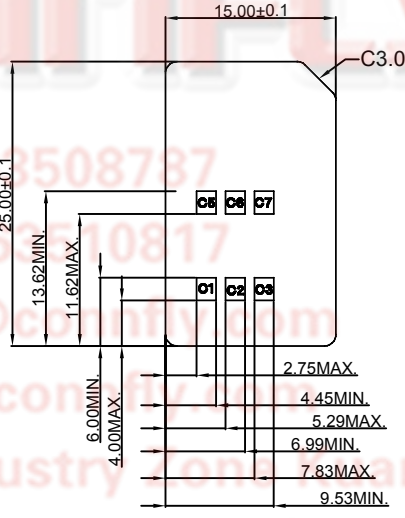




The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNPLY reserves all rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/09/15'	HZW 06/09/15'	LJC 06/09/15'
B	DRAWING UPDATE	JLZ 08/18/18'		

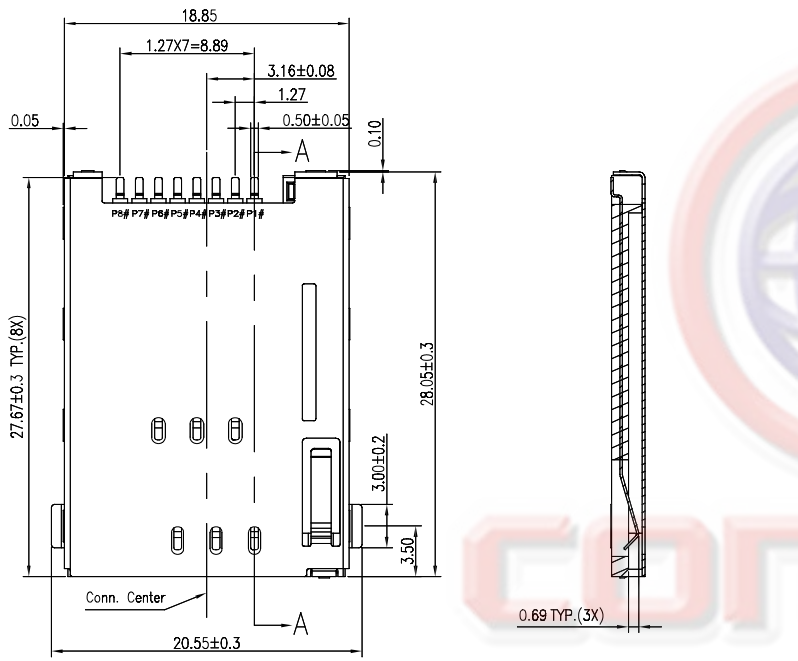


Applicable Card Size
Thickness: 0.76±0.08

Notes:

- Material:
 - Housing: High Temperature UL 94V-0.
 - Contacts: Copper Alloy. Selective Gold Flash.
 - Shell: Stainless Steel.
- Specifications:
 - Operate Temperature: -40° C~+85° C
 - Insulation Resistance: 1000MΩ Min.
 - Contact Resistance: 50mΩ max.
 - Withstanding Voltage: 500V AC 1min.
 - Voltage Rating: 30V AC/DC
 - Current Rating: 0.5A
- Product Number Code:

DS1138-10 - XX X X X X X X

- Packing Type
 - R: Tape On Reel
 - B: Tube
- Post Support
 - X: W/O Post
- Housing color
 - B: Black
- Contact Plating
 - 0: Selective gold flash
 - 4: Selective 3u" gold
 - J: Selective 5u" gold
 - 1: Selective 10u" gold
- Mounting type
 - S: SMT type
- Connector type
 - S: Socket
- No. of contacts
 - 08: 8pin

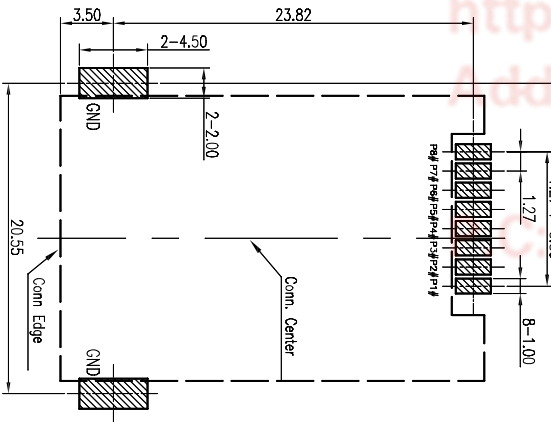


RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1138-10-XXXXXXX-B		

PROJECTION	TITLE
UNITS	1.27mm SIM Card H=2.25mm
SHEET SIZE	6+2 Positions SMT Type W/O Post
	SERIES DS1138-10 SERIES

 晨翔电子有限公司
CONNPLY CONNPLY ELECTRONIC CO. LTD