
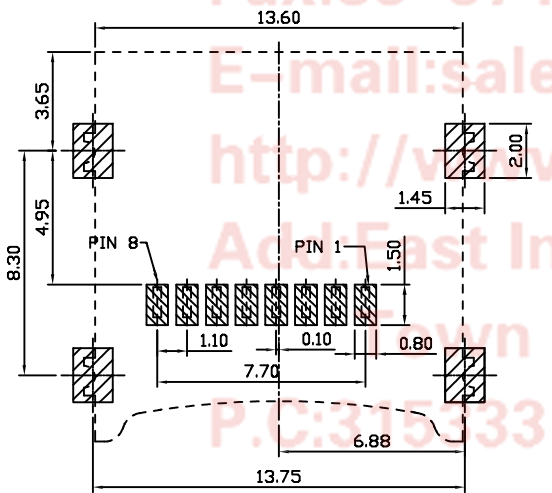
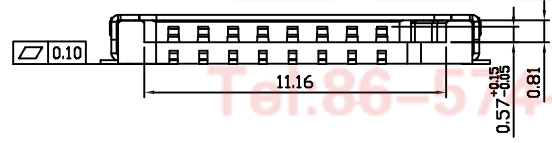


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/10/14'		

- Notes:
- Material:
 - Housing: High Temperature LCP, UL94V-0 Roted Color: Black.
 - Contacts: Copper Alloy.
 - Stator: Copper Alloy.
 - Shell: Stainless Steel.
 - Specifications:
 - Operate Temperature: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$
 - Insulation Resistance: 1000M Ω Min.
 - Contact Resistance: 30m Ω max.
 - Withstanding Voltage: 500V AC 1min.
 - Operating Voltage: 30V AC/DC.
 - Current Rating: 1.0A
 - Product Number Code:

DS1139-04 - XX X X X X X X

- Packing Type
R: Tape On Reel
- Shell Plating
S: Stainless
- Housing color
B: Black
- Contact Plating
4: Selective 3u" gold
- Mounting type
S: SMT type
- Connector type
S: Socket
- No. of contacts
08:08pin

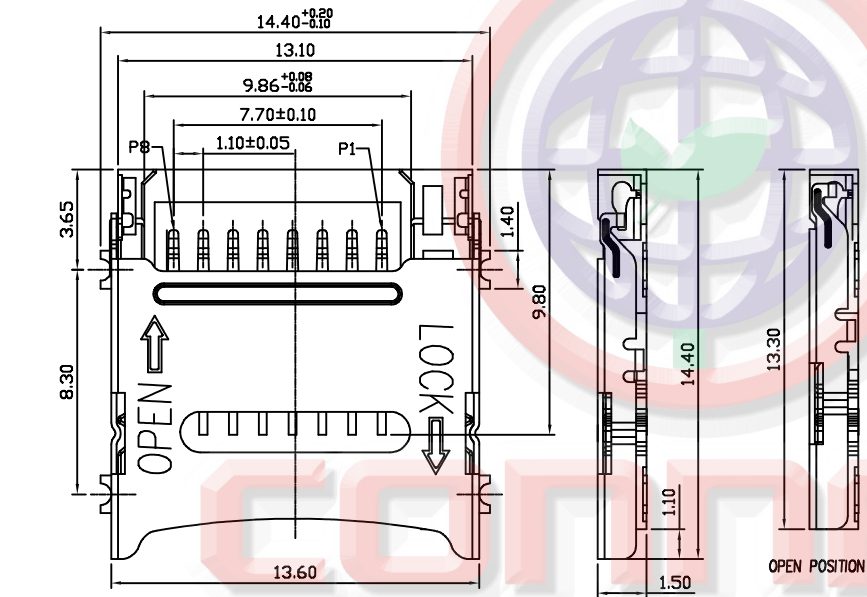

RECOMMENDED PCB LAYOUT
TOLERANCES: ± 0.05

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@connfly.com
 http://www.connfly.com
 Add: East Industry Zone KuangYan
 Cixi Ningbo China
 P.C: 315533

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	± 0.60	X.	$\pm 5^{\circ}$	UNITS	mm	Micro SD Card H=1.5mm SMT Type	
.X	± 0.38	.X	$\pm 3^{\circ}$	SHEET SIZE	A4	SERIES	DS1139-04 SERIES
.XX	± 0.25	.XX	$\pm 2^{\circ}$	晨翔电子有限公司 CONNFLY® CONNFLY ELECTRONIC CO., LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1139-04-XXXXXX-A					