
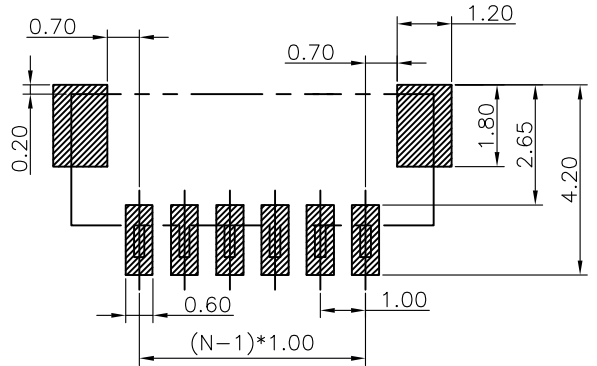
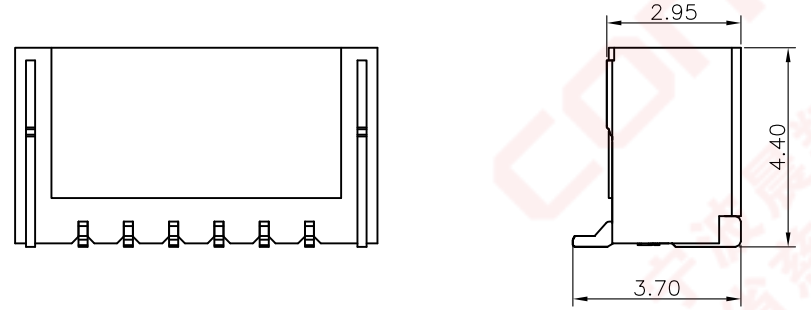


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A | NEW RELEASE | JLZ 08/11/16' | | |
| | | | | |
| | | | | |

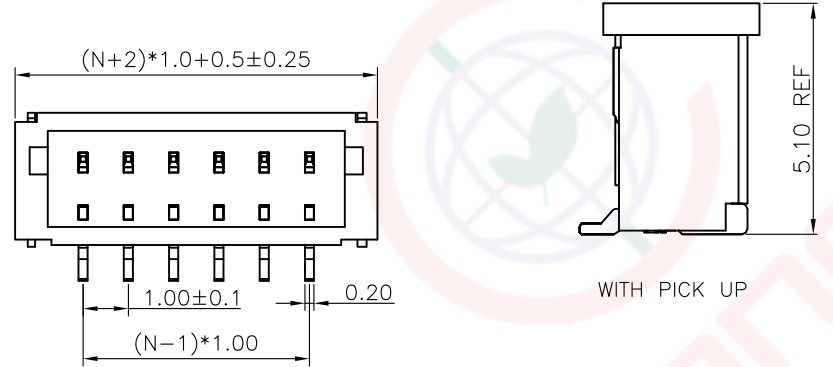

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT: COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE RANGE:-40~+85°C.
 - CONTACT RESISTANCE:20mΩ max.
 - INSULATION RESISTANCE:500MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 250V PER MINUTE.
- PRODUCT NUMBER CODE:
 DS1147-02- X X X X X X
 - PACKING TYPE
R: TAPE ON REEL
B: TUBE
 - PICK UP SUPPORT
S: W/ PICK UP
X: W/O PICK UP
 - CONTACT PLATING
6: TIN
 - HOUSING COLOR
V:IVORY
 - MOUNTING TYPE
S: SMT TYPE
 - CONNECTOR TYPE
M: MALE
 - No. OF CONTACTS
02~20

| | | | | | | | |
|-------------------|-------|----------------------|-----|---|----|--------|------------------------|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | 1.00mm WAFER CONNECTOR |
| X. | ±0.60 | X. | ±5° | UNITS | mm | | V/T SMT TYPE |
| .X | ±0.38 | .X | ±3° | SHEET SIZE | A4 | SERIES | DS1147-02 SERIES |
| .XX | ±0.25 | .XX | ±2° | 晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD | | | |
| DRAWING TYPE | | CUSTOMER | | | | | |
| SCALE | | 1:1 SHEET 1 OF 1 | | | | | |
| DRAWING NO. | | C-DS1147-02-XXXXXX-A | | | | | |

1 2 3 4 5 6 7 8