


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY reserves the right to make changes to this document without notice. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/01/23'		

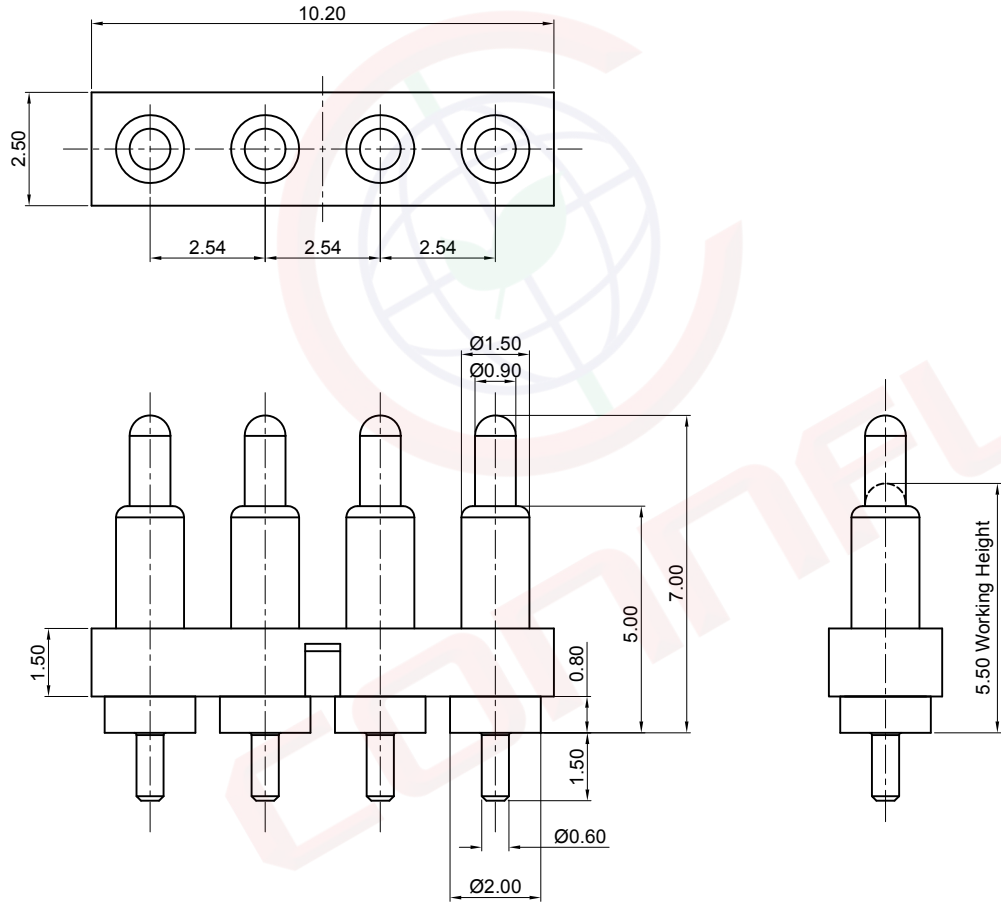

**Notes:**

**Specifications:**

1. Contact Resistance: 50mΩ Max.
2. Current Rating: 1A.
3. Voltage Rating: 12V DC rms.

**Materials:**

1. Barrel: Copper Alloy, Gold Plating Over Nickel.
2. Plunger: Copper Alloy, Gold Plating Over Nickel.
3. Spring: Stainless steel wire.
4. Housing material: High Temp, Black.

**Product Number Code:**

DS1156-03 - X X X X X X X

- Pick Up Support
- X: W/O Pick Up
- Dim A.B.C.D.E.F..... Type
- 1: Type 1
- Packing Type
- P: Ploybag
- Barrel Plating
- C: Full 3u" gold
- Plunger Plating
- C: Full 3u" gold
- Mounting Type
- S: SMT type
- Contact Type
- P: Plug

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	4 Pin pogo pin connector plain base type	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1156-03 SERIES	
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNFLY CONNELY ELECTRONIC CO. LTD</b>				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1156-03-PSCCP1X-A						