
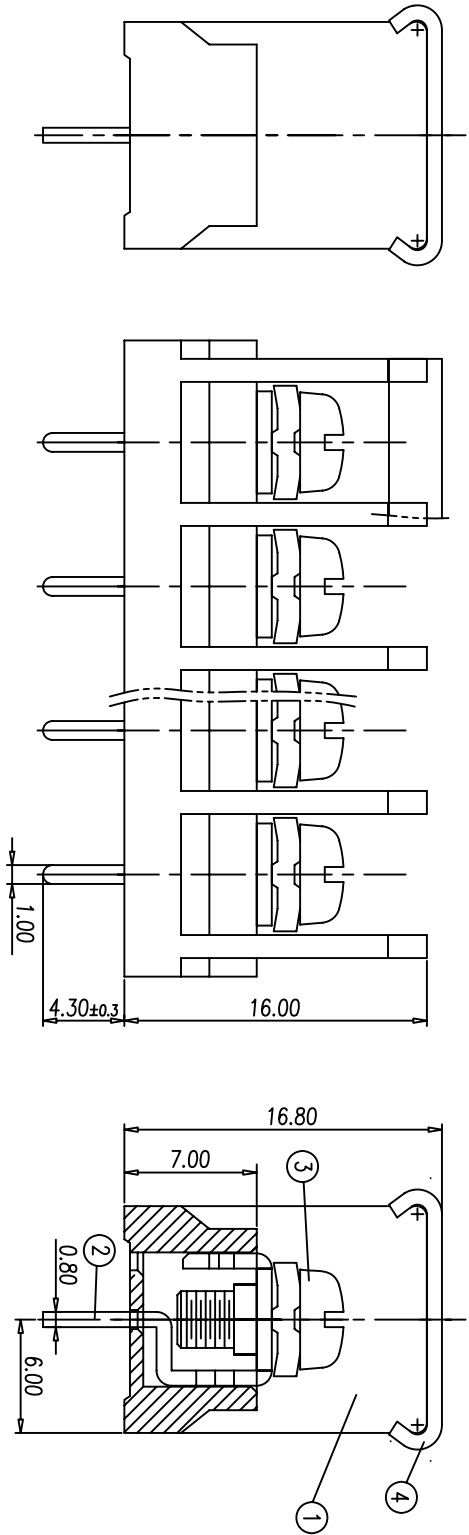
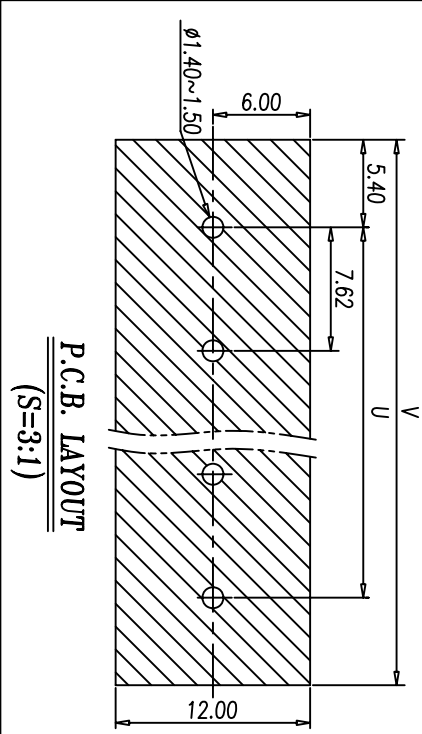


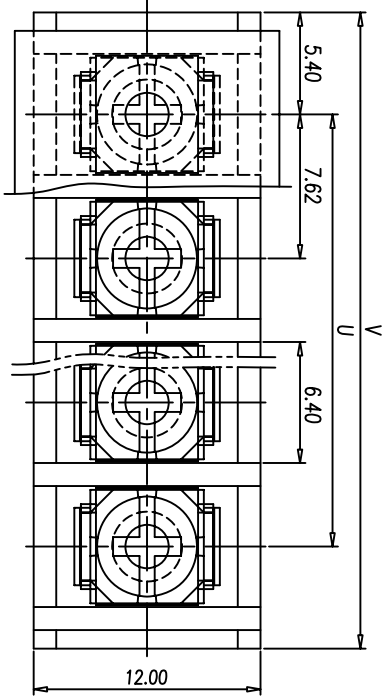

- NOTES:
1. Rating: 300V/15A
PITCH: 7.62mm
 2. Insulation Withstands Voltage:
AC 2000V/MIN
 3. Insulation Resistance:
1000M Ω or more at DC500V
 4. Using Temperature Range:
-40°C~+130°C
 5. Screw Torque Value: 8kg-cm
 6. Suitable Electric Wire: 22~14AWG
 7. RoHS Compliance

Normal Geometric Tolerancing			
	//	$\equiv$	$\perp$
0 to 100 over 100 to 150 over 150	0.2 0.3 0.5	0 to 10 over 10	0.2 0.3

Total Pitch Tolerances	Normal dimension Tolerances
0d≤30	0~30 ±0.25
30d≤53	over 30~53 ±0.30
53d≤70	over 53~70 ±0.35
70d≤90	over 70~90 ±0.44
90d≤115	over 90~115 ±0.55
115d≤150	over 115~150 ±0.70
150d≤200	over 150~200 ±0.85
200d≤250	over 200~250 ±1.00
250d≤320	over 250~320 ±1.20

P	2	3	4	5	6	7	8	9	10	11	12	13
U	7.62	15.24	22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	91.44
V	18.42	26.04	33.66	41.28	48.90	56.52	64.14	71.76	79.38	87.00	94.62	102.24
P	14	15	16	17	18	19	20	21	22	23	24	25
U	99.06	106.68	114.30	121.92	129.54	137.16	144.78	152.40	160.02	167.64	175.26	182.88
V	109.86	117.48	125.10	132.72	140.34	147.96	155.58	163.20	170.82	178.44	186.06	193.68
P	26	27	28									
U	190.50	198.12	205.74									
V	201.30	208.92	216.54									

REV.	CONTENT	CHK.	DATE

DWG.	YP.L	DATE	2009.11.05	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	3.5:1		
APP.		DATE		NAME	DT-2G-B01W-XX		
				DINKLE ENTERPRISE CO., LTD	DWG NO.	SP-03-DT2GB01W	