





## Headers(Sockets) for pluggable terminal blocks / ECH &amp; EHD series

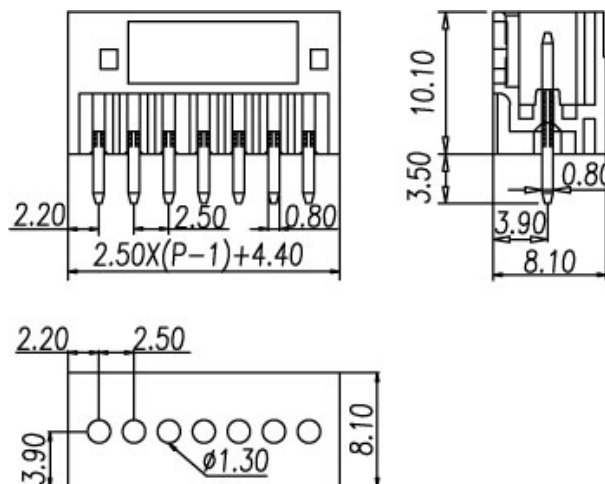

## ECH250V

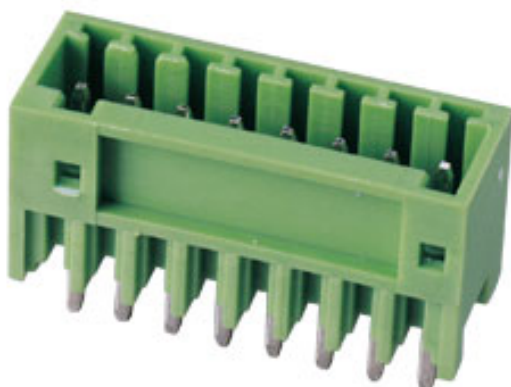

Pitch: 2.50mm

| Approval                                                  |                 |      |
|-----------------------------------------------------------|-----------------|------|
| Technical Data                                            | UL              | IEC  |
| Rated voltage                                             | 150V            | 130V |
| Rated current                                             | 4A              | 4A   |
| Conductor cross-section, solid (AWG/ mm <sup>2</sup> )    |                 |      |
| Conductor cross-section, flexible (AWG/ mm <sup>2</sup> ) |                 |      |
| Rated surge voltage (UL/IEC/Max.)                         | 1.3 / 1.25 / KV |      |
| Torque (N-m)                                              |                 |      |
| Screw                                                     |                 |      |
| Wire strip length                                         |                 |      |
| Pole                                                      | Cat. No.        |      |
| 02                                                        | ECH250V-02P     |      |
| :                                                         | :               |      |
| :                                                         | :               |      |
| 24                                                        | ECH250V-24P     |      |