


Headers(Sockets) for pluggable terminal blocks / ECH & EHD series



**ECH880**

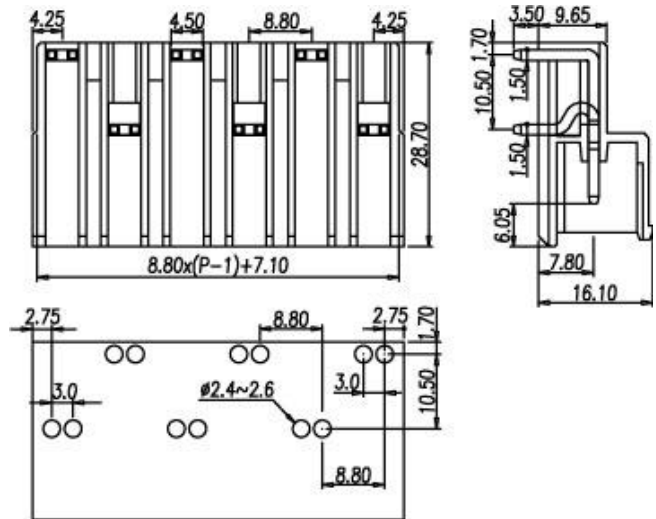

**Pitch: 8.80mm**

Approval		
Technical Data	UL	IEC
Rated voltage	600V	750V
Rated current	30A	57A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )		
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )		
Rated surge voltage (UL/IEC/Max.)	2.2 / 3 / 4 KV	
Torque (N-m)		
Screw		
Wire strip length		
<b>Pole</b>	<b>Cat. No.</b>	
02	ECH880-02P	
:	:	
:	:	
12	ECH880-12P	

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw