




Wire protector type terminal blocks / ED series



ED508V

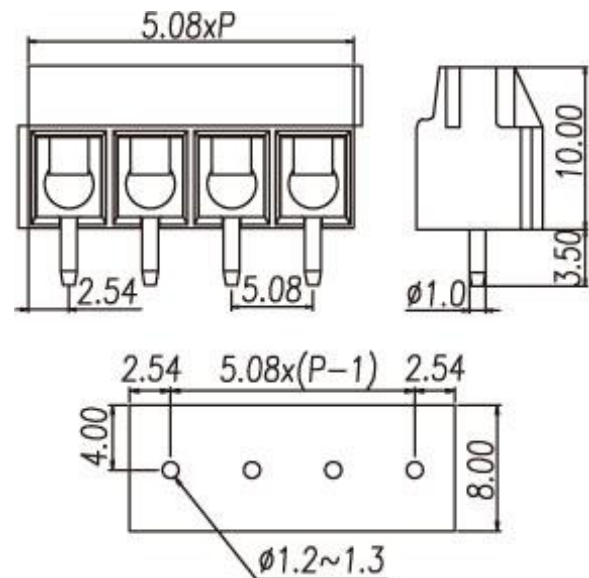

Pitch: 5.08mm

Approval	 	
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	16A	17.5A
Conductor cross-section, solid (AWG/ mm ²)	24~14 / 0.5~1.5	
Conductor cross-section, flexible (AWG/ mm ²)	24~14 / 0.5~1.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / 4 KV	
Torque (N-m)	0.40	
Screw	M2.5	
Wire strip length	5~6mm	
Pole	Cat. No.	
02	ED508V-02P	
03	ED508V-03P	