
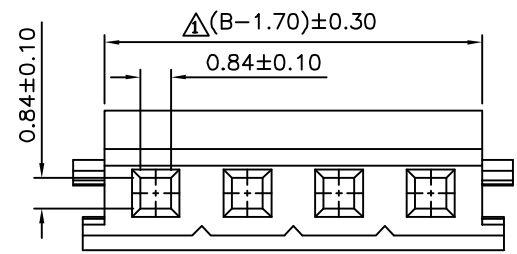
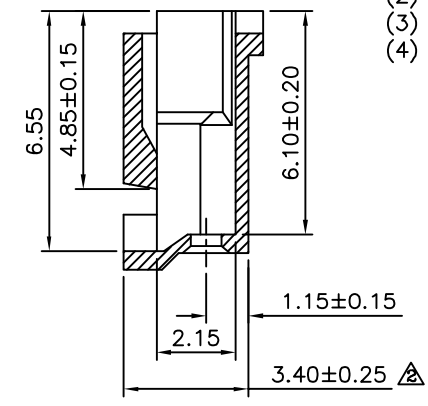
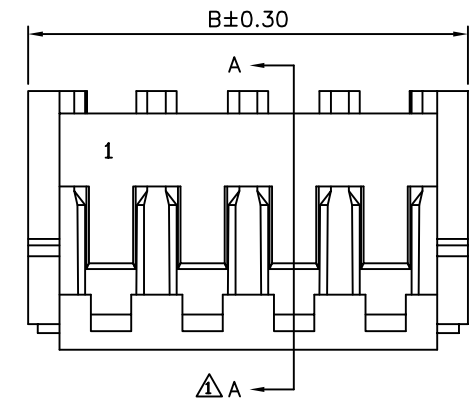
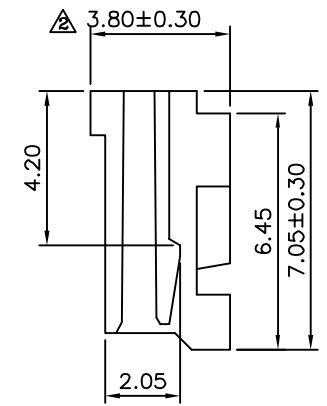


△ SPECIFICATION
 Current Rating:2.5A AC/DC
 Voltage Rating:250V AC/DC
 Withstand Voltage:800V AC/Minute
△ Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Insulator:PA66(UL94V-0),Milk White
 RoHS Compliant

△ EH XX H - H
 (1) (2) (3) (4)
△ (1) EH:2.5mm EH Series
 (2) XX:No. Of Position
 (3) H:Female Housing
 (4) H:RoHS Compliant

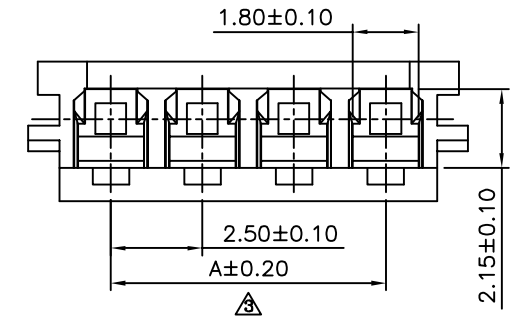

Pin	A	B
02	2.50	7.00
03	5.00	9.50
04	7.50	12.00
05	10.00	14.50
06	12.50	17.00
07	15.00	19.50
08	17.50	22.00
09	20.00	24.50
10	22.50	27.00
11	25.00	29.50
12	27.50	32.00
13	30.00	34.50
14	32.50	37.00
15	35.00	39.50

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X ±0.25 △ XX ±0.20 △ XXX ±0.10 △ XXXX ±0.05 △ XXXX ±0.02
PART No. EHXXH-H		CHECKED BY HZF		
DRAWING No. EHXXH-H		DRAWING BY SAN		
SCALE	NONE	REV.	A3	
UNIT mm				NO.REV.

△ A3	Modify Data	HZF	06/09/2014
△ A2	Modify Data	HZF	03/02/2012
△ A1	Modify Data	HZF	12/01/2010
△ A0	NEW RELEASE	BECKY	05/27/2005
NO.REV.	REVISIONS	CHK	DATE