

End-product drawing

REV.	DESCRIPTION	DESIGN	DATE
(X1)	NEW DRAWING	PDH	2019/10/10

NOTES:


1. MATERIAL: PA66、BRASS、 SILICONE;
2. CERTIFICATION: ROHS/cUL/TUV/SAA/CE;
3. FIRE-PROOT: UL94-V2。
4. NO DEFECT IN APPEARANCE;
5. UNITS: mm;
6. CONDUCTION TEST: THE TWO ENDS OF THE 3 CORE JOINTS ARE RESPECTIVELY CONNECTED
7. A、 MAXIMUM CURRENT-CARRYING CAPACITY: 400V/17.5A
 B、 TEST VOLTAGE: 2500V
 C、 SUITABLE FOR CABLES CROSS SECTIONS: 0.5-1.5mm²
 D、 OPERATING TEMPERATURE RANGE: -40~+105°C
 E、 PROTECTION CLASS: IP68




3 Pins



Silicone parts



φB	Wire OD
φ10.2	φ7-10mm
φ6.5	φ3.5-7mm

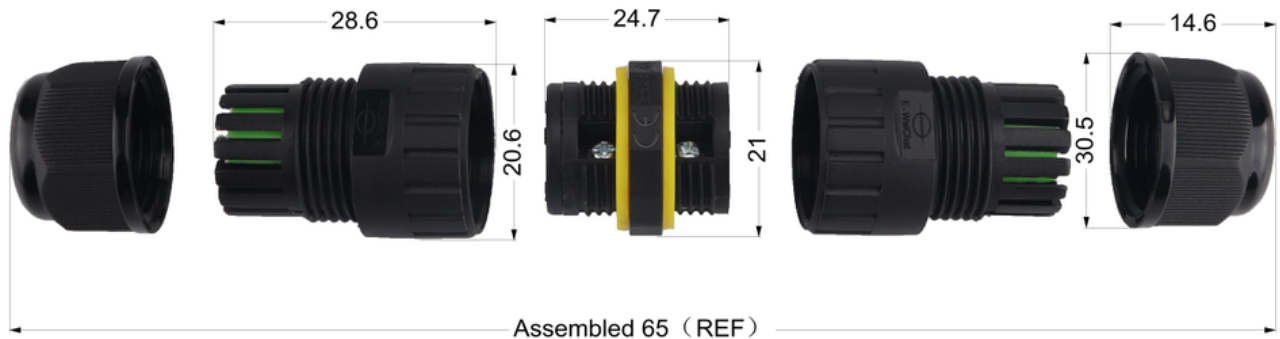

Factory: Xiamen Fucon IMP.&EXP. CO.,LTD
 Waterproof connector (coupling for lighting) with screw brass clamps for two cables

Part No.: EW-M16-3P
 EW-M16 - series of waterproof connector (coupling)
 3P - number of Pins (3 Pins)

Weight	MEAS	Each carton number	G. W.
18.6g	42*30*34cm	1000pcs	19.4Kg

UNLABELED TOLERANCE					UNITS	mm	DRAW	PDH	2019/10/10	PART NO.	EW-M16-3P	FUCON	
X.	±0.35	X.XX	±0.20		X.°	±2°	SCALE	1:1	CHKD		DWG NO		EW-M16-3P
X.X	±0.25	X.XXX	±0.10		X.X°	±1°	SHEET	1/1	APPD		TITLE		Waterproof connector