Raw Material	PA66、SILICONE、COPPER ALLOY
Certification	UL/CQC/RoHS/CE
Flame-resistant rating	UL94 V-0
Level of protection	IP68
Voltage rating/Current rating	450 V / 20 A
Withstanding voltage	2500 V
Cable gague	0.5～2.5mm²
Operating temperature	-40～105 ℃

REV	DESCRIPTION	DESIGN	DATE
A0	NEW DRAWING	Andy.Pi	2022/4/7

3 PIN

Pole Female connector

Pin Male connector

The color of the product is subject to the actual product, the picture is for reference only

Part Number	Rubbers Diameter(d)	Outer Cable Diameter
	Φ10.2 mm	Φ7～10 mm
	Φ8.1 mm	Φ5～8 mm
	Φ6.5 mm	Φ3.5～7 mm

Factory: Xiamen Fucon IMP.&EXP. CO.,LTD
Waterproof coupling (female connector and male connector for lighting) with screw copper alloy clamps for two cables

Part No.: EW-M19MF-03X01
EW-M19MF - series of waterproof coupling (female connector and male connector)
03 - number of Pins (3 Pins)
X01 - no value

Rubbers Diameter

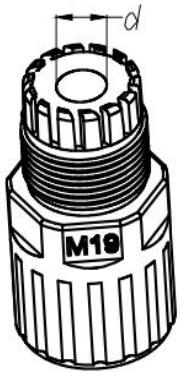

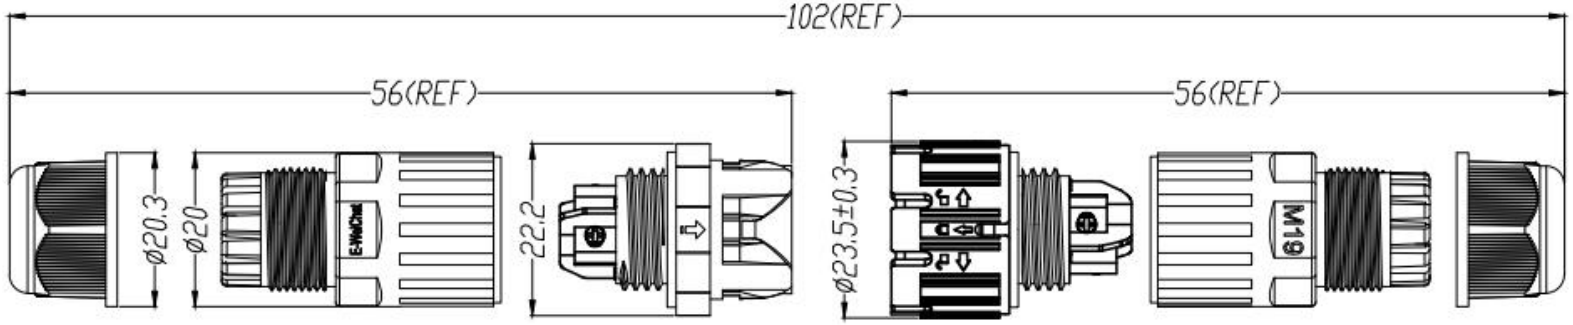

TOLERANCE UNSPECIFIED			UNIT	mm	DRAW		P/N	EW-M19MF-03X01	
X. ±0.35	X.XX ±0.10	X.° ±3° X.X° ±2° X.XX° ±1°	SCALE	1:1	CHKD		D/N		FUCON
X.X ±0.20	X.XXX ±0.05		SHEET	1/1	APPD		TITLE	EW-M19MF WATERPROOF CONNECTOR	

20g	42x30x26 cm	1000 PCS	20.7 Kg
Weight	MEAS	Each carton number	G.W.