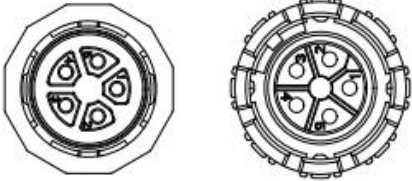


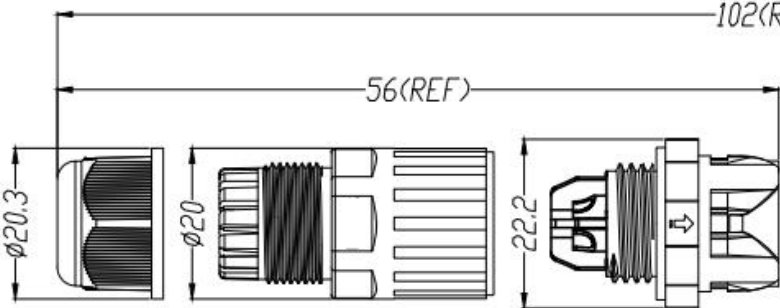







1	2	3	4	5	6	7	8																																		
A	Raw Material	PA66、SILICONE、 COPPER ALLOY	<p style="text-align: center;">5 PIN</p>  <p style="text-align: center;">Pole Female connector    Pin Male connector</p>		<table border="1"> <tr> <th>REV</th> <th>DESCRIPTION</th> <th>DESIGN</th> <th>DATE</th> </tr> <tr> <td>A0</td> <td>NEW DRAWING</td> <td>Andy. Pi</td> <td>2022/4/7</td> </tr> </table>		REV	DESCRIPTION	DESIGN	DATE	A0	NEW DRAWING	Andy. Pi	2022/4/7																											
	REV	DESCRIPTION			DESIGN	DATE																																			
	A0	NEW DRAWING			Andy. Pi	2022/4/7																																			
	Certification	UL/CQC/RoHS/CE																																							
	Flame-resistant rating	UL94 V-0																																							
	Level of protection	IP68																																							
	Voltage rating/Current rating	450 V / 16 A																																							
Withstanding voltage	2500 V																																								
Cable gague	0.5~1.5mm <sup>2</sup>																																								
B	Operating temperature	-40~105 °C																																							
	Part Number	Rubbers Diameter(d)	Outer Cable Diameter	<p><b>Factory: Xiamen Fucon IMP&amp;EXP CO.,LTD</b>  <b>Waterproof coupling (female connector and male connector for lighting) with screw copper alloy clamps for two cables</b></p> <p><b>Part No.: EW-M19MF-05X01</b>  <b>EW-M19MF - series of waterproof coupling (female connector and male connector)</b>  <b>05 - number of Pins (5 Pins)</b>  <b>X01 - no value</b></p>																																					
		$\phi$ 10.2 mm	$\phi$ 7~10 mm																																						
	$\phi$ 8.1 mm	$\phi$ 5~8 mm																																							
C		$\phi$ 6.5 mm	$\phi$ 3.5~7 mm																																						
	Rubbers Diameter					<p>The color of the product is subject to the actual product, the picture is for reference only</p>																																			
D																																									
																																									
E																																									
	22.25 g	42x30x26 cm	1000 PCS	22.95 Kg	<table border="1"> <tr> <th colspan="3">TOLERANCE UNSPECIFIED</th> <th>UNIT</th> <th>mm</th> <th>DRAW</th> <th>P/N</th> <th>EW-M19MF-05X01</th> </tr> <tr> <td>X. ±0.35</td> <td>X.XX ±0.10</td> <td>X.° ±3°</td> <td>SCALE</td> <td>1:1</td> <td>CHKD</td> <td>D/N</td> <td></td> </tr> <tr> <td>X.X ±0.20</td> <td>X.XXX ±0.05</td> <td>X.X° ±2°</td> <td>SHEET</td> <td>1/1</td> <td>APPD</td> <td>TITLE</td> <td>EW-M19MF-5P WATERPROOF CONNECTOR</td> </tr> <tr> <td></td> <td></td> <td>X.XX° ±1°</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>		TOLERANCE UNSPECIFIED			UNIT	mm	DRAW	P/N	EW-M19MF-05X01	X. ±0.35	X.XX ±0.10	X.° ±3°	SCALE	1:1	CHKD	D/N		X.X ±0.20	X.XXX ±0.05	X.X° ±2°	SHEET	1/1	APPD	TITLE	EW-M19MF-5P WATERPROOF CONNECTOR			X.XX° ±1°								
	TOLERANCE UNSPECIFIED			UNIT	mm	DRAW	P/N	EW-M19MF-05X01																																	
X. ±0.35	X.XX ±0.10	X.° ±3°	SCALE	1:1	CHKD	D/N																																			
X.X ±0.20	X.XXX ±0.05	X.X° ±2°	SHEET	1/1	APPD	TITLE	EW-M19MF-5P WATERPROOF CONNECTOR																																		
		X.XX° ±1°																																							
Weight	MEAS	Each carton number	G. W.					FUCON																																	
1	2	3	4	5	6	7	8																																		