



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

仅供参考图

签字: 蓝贵凡

日期: 2018.08.15

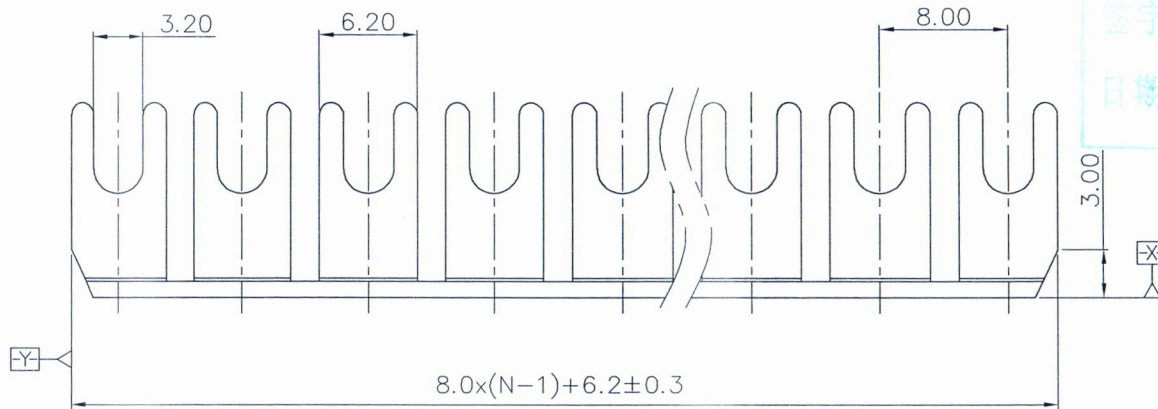


NOTES:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 8.0mm, Poles : N=02~10P
- 3.Undimensioned tolerances:


Pitch range in mm		Nominal dimension range in mm					-	∩	∇
To	Over	Over	To	Over	Over	Over	0.1/10	≤	
6	10	24	30	60	100	150			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

4.RoHS Compliance

FBR16-RTK/S - XXP - 00A (H)
 (Series No.) (Poles) 00A-(Standard) (RoHS)

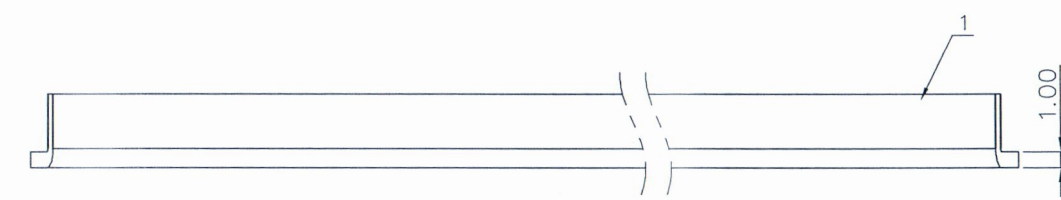

Combination part

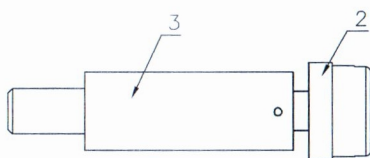

ITEM	NAME OF PART	MATERIAL	NOTES
3	Sleeve	Copper alloy	Sn plated
2	Screw	Steel	Ni plated/M3
1	Current carrier	Copper	Sn plated

PART NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	NAME: FBR16-RTK/S-XXP-00A(H)		
APPD: <i>Alm 2018.08.15</i>	TITLE: CUSTOMER DRAWING		
CHKD:	DRFT: Kevin 2018.04.26	REV	DO-1
DRAWING NO.: FBR16-RTK/S-C01		SHEET	1/1
THIRD ANGLE PROJECTION		SCALE	1:1