



SPECIFICATION

Current Rating:1A AC,DC
 Voltage Rating:250V AC,DC
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature Range:-40°C~+105°C
 Insulator:PBT+G.F.(UL94V-0)
 Contact:Brass
 6P Without Slot,8P/10P/12P Without Left Slot
 RoHS Compliant





FC 30 XX T12 -SXX - H
 (1) (2) (3) (4) (5) (6)

- (1) FC:2.54 IDC Connector
 (2) 30:With S.R.
 (3) XX:No. Of Position
 (4) T12:Pin Row Pitch=1.2
 (5) SXX:Contact Finish
 Blank:Gold Flash On Contact Area,
 Under Nickel
 S15:Gold Plated 15u" On Contact Area,
 Under Nickel
 S30:Gold Plated 30u" On Contact Area,
 Under Nickel
 (6) H:RoHS Compliant



Pin	A	B	C	D	Pin	A	B	C	D
6	5.08	12.32	12.12	1.42	26	30.48	37.72	37.52	1.42
8	7.62	14.86	14.66	1.42	28	33.02	40.26	40.06	1.42
10	10.16	17.40	17.20	1.42	30	35.56	42.80	42.60	1.42
12	12.7	19.94	19.74	1.42	34	40.64	47.88	47.68	1.42
14	15.24	22.48	22.28	1.42	40	48.26	55.5	55.3	1.48
16	17.78	25.02	24.82	1.42	50	60.96	68.20	68.00	1.42
18	20.32	27.56	27.36	1.42	60	73.66	80.90	80.70	1.42
20	22.86	30.10	29.90	1.42	64	78.74	85.98	85.78	1.42
24	27.94	35.18	34.98	1.42					

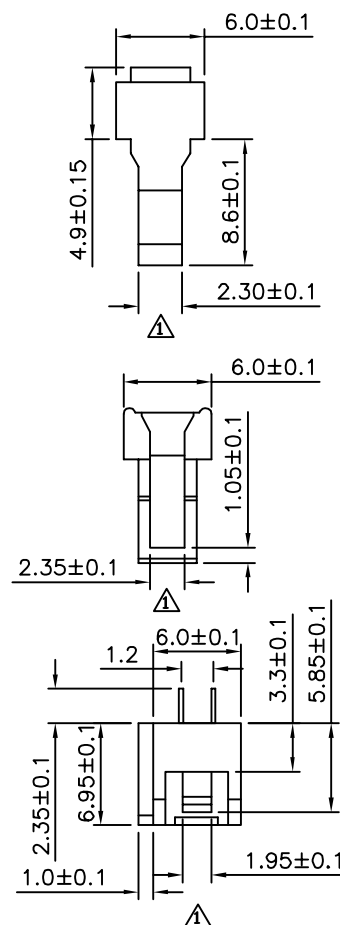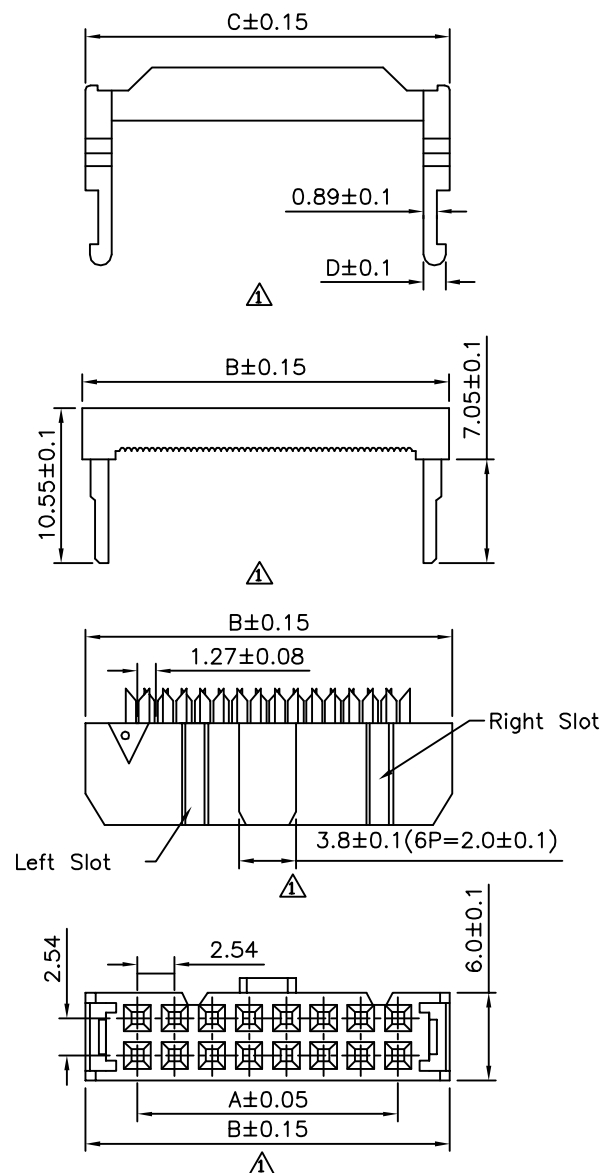

A MEMBER OF AUK GROUP

太聯事業股份有限公司
 AUK CONTRACTORS CO., LTD.

CATEGORY

APPROVED BY

EMILY

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X ± 0.2 .X ± 0.1 .XX ± 0.05 ANG. $\pm 2^\circ$

PART No.

FC30XXT12-SXX-H

CHECKED BY

HZF

DRAWING No.

FC30XXT12-SXX-H

DRAWING BY

SONG

SCALE

NONE

REV.

A1

UNIT

mm



NO./REV.

REVISIONS

CHK

DATE

A1

Modify P/N:FC30XXT12-H-->FC30XXT12-SXX-H

HZF

05/17/2011

A0

NEW RELEASE

HZF

01/13/2010